


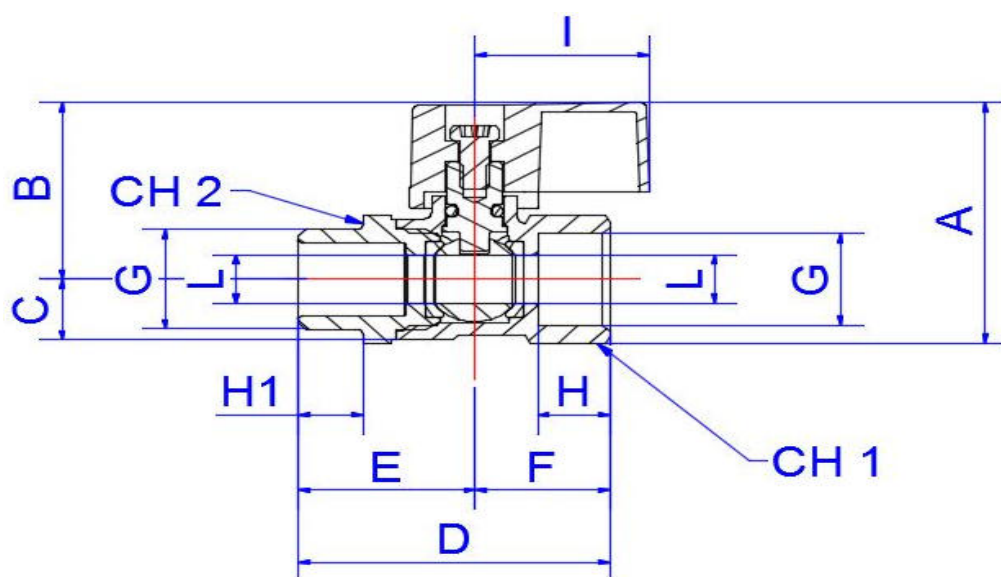

| Misura<br>Size | A    | B    | C    | D    | E    | F    | G    | H  | H1 | I    | L  | CH1 | CH2 | PN Max<br>BAR |
|----------------|------|------|------|------|------|------|------|----|----|------|----|-----|-----|---------------|
| 1/4"           | 39,6 | 29   | 10,5 | 43,3 | 24,5 | 18,8 | 1/4" | 10 | 9  | 24,3 | 8  | 19  | 19  | 20            |
| 3/8"           | 39,6 | 29   | 10,5 | 43,3 | 24,5 | 18,8 | 3/8" | 10 | 9  | 24,3 | 8  | 19  | 19  | 20            |
| 1/2"           | 43,8 | 30,3 | 13,5 | 47   | 26,5 | 20,5 | 1/2" | 10 | 10 | 24,3 | 10 | 25  | 25  | 20            |

## MATERIALS

BODY: Brass CW617N-UNIEN12165

SLEEVE: Brass CW614N-UNIEN12164

BALL: Brass CW614N-UNIEN12164 chrome-plated

STEM: Brass CW614N-UNIEN12164

SEALS: pure PTFE

O-Ring: Nbr

HANDLE: Abs

SCREW: Zincplated steel

Working temperature:  
**-10° +90°C**

Threads: **UNI ISO 228/1**

**FINAL TEST**  
conforming with  
UNI EN 12266-1 points A3 - A4