


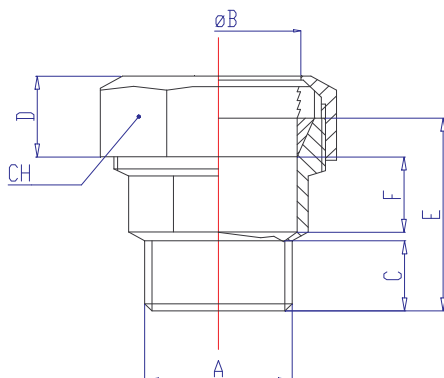

MATERIALS

BODY: Brass CW617N-UNIEN12165

NUT: Brass CW617N-UNIEN12165

FASTENER RING + CONICAL SEAL: polyamide + NBR

**ONE
COMPONENT
ONLY!!**

ART. 4301 Straight male fitting for PE pipe

QUICK CONNECTION

Misura	A	B	C	D	E	F	CH
20	1/2"	21	12,4	17	38	15	34
25	3/4"	26	15	19	45	17	41
32	1"	33	17	22	50	17	51
40	1,1/4"	42	17,6	24	56	22	59
50	1,1/2"	52	19	25,6	64	27	70
63	2"	65	21,2	29,5	73	28	87

TECHNICAL DATA:

Max Working pressure: **25 bar**


Working temperature: **-15° +110°C**

Threads: **UNI ISO 228/1**

For high and low density PE pipes

Tests conforming to:

UNI EN 1254-3:2000 (UNI EN 712, 713, 715)

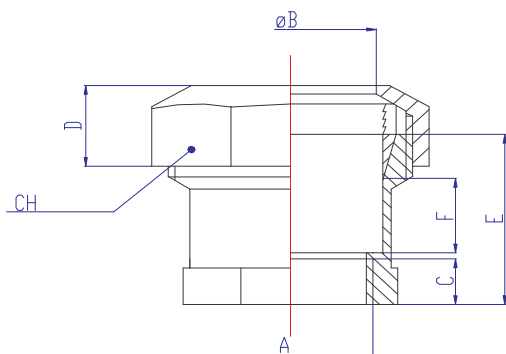

MATERIALS

BODY: Brass CW617N-UNIEN12165

NUT: Brass CW617N-UNIEN12165

FASTENER RING + CONICAL SEAL: polyamide + NBR

**ONE
COMPONENT
ONLY!!**

ART. 4302 Straight female fitting for PE pipe

QUICK CONNECTION

Misura	A	B	C	D	E	F	CH
20	1/2"	21	11	17	35	14	34
25	3/4"	26	12	19	42	15	41
32	1"	33	13	22	46	17	51
40	1,1/4"	42	15	24	53	22	59
50	1,1/2"	52	15	25,6	56	24	70
63	2"	65	17	29,5	62	24	87

TECHNICAL DATA:

Max Working pressure: **25 bar**

Working temperature: **-15° +110°C**

Threads: **UNI ISO 228/1**

For high and low density PE pipes

Tests conforming to:

UNI EN 1254-3:2000 (UNI EN 712, 713, 715)