


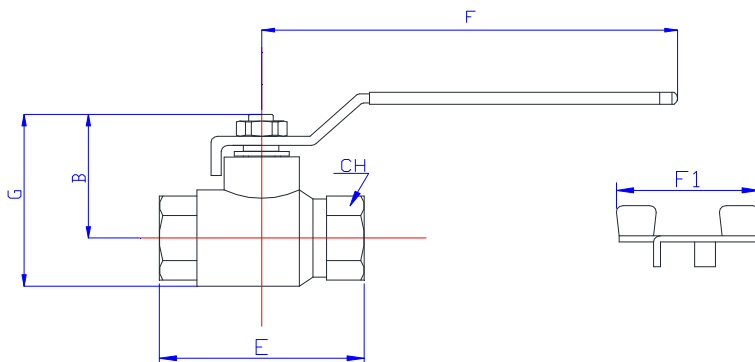

Misura Size	B	E	F	G	F1	CH	DN	F. thread lenght	PN Max BAR
1/2"	38	51	100	53	68	25	15	10	45
3/4"	41	59	100	60	68	31	20	12	45
1"	48	70	100	70	68	38	25	14	40
1,1/4"	57	81	158	86	-	47	32	16	30
1,1/2"	63	92	158	98	-	54	40	16	30
2"	77	110	158	120	-	66	50	19	30

MATERIALS

BODY, END CONNECTION: Brass CW617N-UNIEN12165

STEM: Brass CW614N-UNIEN12164

BALL: Brass CW617N-UNIEN12165 chrome-plated

O-Rings: Nbr+Fkm

SEALS: pure PTFE



HANDLE: Zincplated steel, plastic cover

SEGER: bronze

NUT: Zincplated steel

TECHNICAL DATA

pressure / temperature

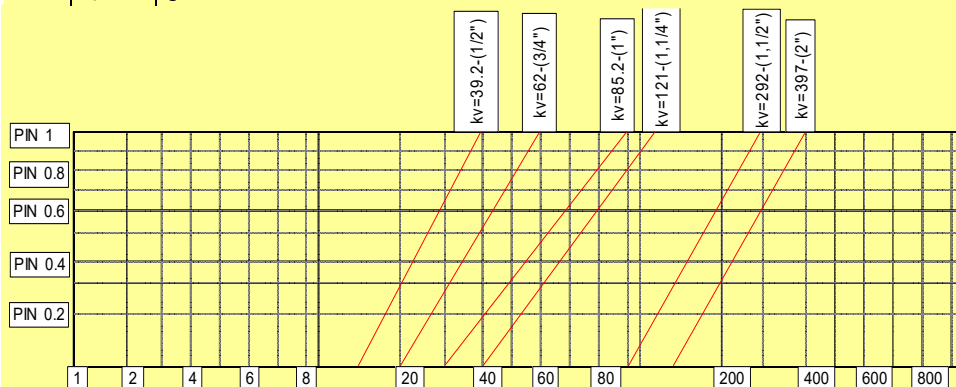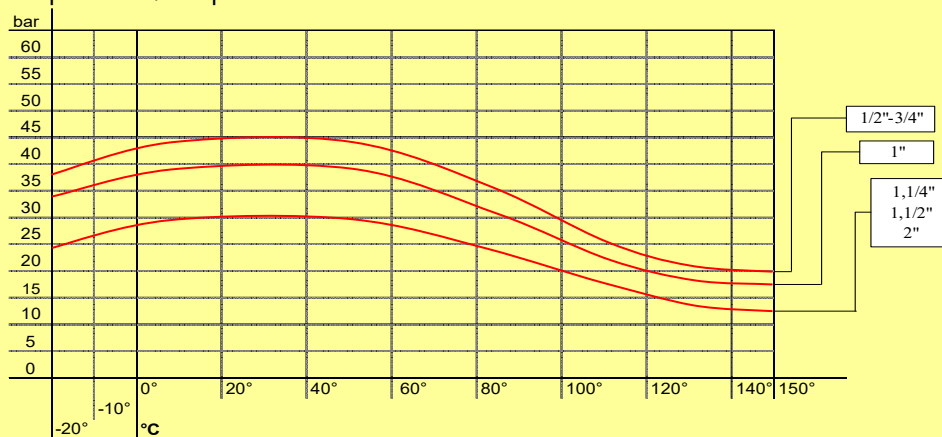

Threads: **UNI ISO 228/1**

Working temperature: **-10° +120°C**

Valve conforming with directive
2014/68/EU

FINAL TEST

conforming with

UNI EN 12266-1 points A3 - A4

For 1,1/2"-2" sizes: conforming
 with directive **2014/68/EU**

INSTRUCTIONS: Valve opened: the handle is parallel to the body

Valve closed: the handle is perpendicular to the body

This valve must be employed according to this data sheet instructions. For 1,1/4" and superior sizes, it can't be used for dangerous fluid

in according to Directive 2014/68/EU art. 13.1 a)