


PUSH-LOCK COUPLING

MANUFACTURING & MACHINE TOOLS


Auto process

Used with push-on fittings at maximum working pressure of 16bar (250psi).

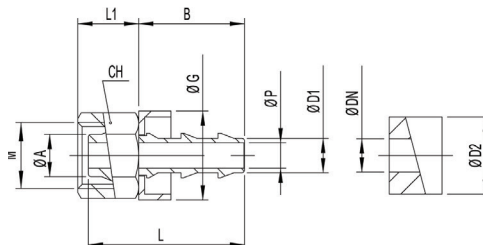

Metric Female

Ø A	DN	Ø D1	Ø D2	CH	Ø G	L	B	L1	Ø P	M	Packaging	Article number	Notes
6	1/4	6.3	13	12	16.7	32.5	20	11.5	4.8	M10x1	10	5103630	
8	1/4	6.3	13	14	16.7	29.5	20	12.5	4.8	M12x1	10	5103631	
10	1/4	6.3	13	19	16.7	30.5	24	14	4.8	M16x1.5	10	5103632	
10	3/8	9.5	16	19	19.5	34.5	24	14	7.5	M16x1.5	10	5103633	
14	3/8	9.5	16	24	19.5	36	28	15	7.5	M20x1.5	10	5103634	
14	1/2	12.7	19	24	23.5	40	28	15	10	M20x1.5	10	5103635	
18	1/2	12.7	19	30	23.5	40.5	36.5	17	10	M24x1.5	10	5103636	
18	5/8	15.7	23	30	27.3	49	36.5	17	13.5	M24x1.5	10	5103637	
22	3/4	18.8	27	36	30.8	57.5	43	17	16	M30x1.5	10	5103638	

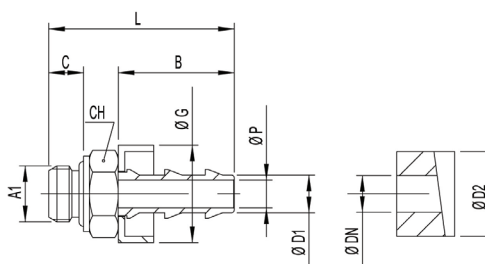

BSP Male

A1	DN	Ø D1	Ø D2	CH	Ø G	L	B	C	Ø P	Packaging	Article number	Notes
G1/8	1/4	6.3	13	13	16.7	32	20	6	4.8	10	5103640	
G1/4	1/4	6.3	13	17	16.7	35.5	20	8	4.8	10	5103641	
G1/4	3/8	9.5	16	17	19.5	39.5	24	8	7.5	10	5103642	
G3/8	3/8	9.5	16	22	19.5	41	24	9	7.5	10	5103643	
G3/8	1/2	12.7	19	22	23.5	45	28	9	10	10	5103644	
G1/2	1/2	12.7	19	27	23.5	47	28	10	10	10	5103645	
G1/2	5/8	15.7	23	27	27.3	55	36.5	10	13.5	10	5103646	
G3/4	5/8	15.7	23	32	27.3	58.5	36.5	12	13.5	10	5103647	
G3/4	3/4	18.8	27	32	30.8	65	43	12	16	10	5103648	