


## TEKNIKUM®

### Ribbed rubber mat

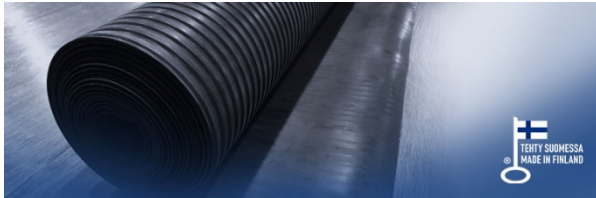

#### APPLICATIONS

Teknikum® Ribbed mat is easy to clean along the direction of the grooves. It's well suited for the protection of floor surfaces in buildings, e.g. in corridors and lifts. It is also suitable as protection in load compartments of utility vehicles, as a corridor mat in buses, and as protective mat and impact protection in industrial production facilities.

The black mats are manufactured from a mixture of natural rubber (NR) and styrene-butadiene rubber (SBR). The mat is also available in grey, when made from nitrile rubber (NBR).

The grey ribbed rubber mat provides electrical insulation and can be used in applications such as electrical cabinets and workstations.

The rubber compound is awarded by "Made in Finland" Key Flag symbol.

Available in black and grey color.

#### ADVANTAGES

- Easy to clean
- Durable, wear-resistant surface to protect flooring
- Suitable for production facilities, utility vehicles and corridors
- Electrical insulation with grey version

#### TECHNICAL PROPERTIES

##### Previous versions

LSAL (same item and structure)

##### Structure

- Mixture of natural rubber (NR) and styrene-butadiene rubber (SBR).
- Optionally from nitrile rubber (NBR).

##### Temperature range

- 40°C... +70°C

#### ENVIRONMENTAL RESISTANCE

- Weather-resistant
- Endures minus temperatures well

#### SERVICES & CUSTOM SHAPES

Special mat shapes can be cut by a water jet cutter. Ask for a project offer.

#### RECYCLING

For decommissioned mats, the correct disposal method is recovery as energy waste, in an appropriate incineration process.

#### MANUFACTURER

Teknikum Ltd (Business ID FI07645274),  
Sementtitehtaankuja 12, FI-04260 Kerava,  
FINLAND

##### More information

[sales@technikum.com](mailto:sales@technikum.com)

[www.technikum.com](http://www.technikum.com)

All rights reserved. © 2020 Teknikum Group Ltd.



## ORDER REFERENCE

TEKNIKUM® Sälematto (in Finland)

Product code	Thickness mm	Standard roll size W x L m*	MOQ	Weight/roll (Nominal weight)	Rubber quality	Color
LSAL6150	6	1500 x 10000	4 rolls	140kg/roll (1,55)	SBR/NR	Black
LSAL9150	9	1500 x 10000	2 rolls	210kg/roll (1,55)	SBR/NR	Black
LSAL6150H	6	1500 x 10000	project	133kg/roll (1,47)	NBR	Grey <sup>1</sup>

\* 33m maximum roll length, unfinished <sup>1</sup> electrical insulation

## AVAILABILITY (table text color)

Blue = on stock

Grey = project orders on demand, check availability from sales

## REFERENCE IMAGES

