

# Rhino Tiles




## Description

RhinoTile™ from Protec is a moulded, non-slip tile manufactured with a cellular structure that provides outstanding durability.

The tiles benefit from a unique interlocking mechanism which makes them quick and easy to install with no need for special skills or tools.

RhinoTile™ offers the perfect heavy duty floor protection solution for absorbing shock and noise while protecting surfaces with unrivalled durability. They are strong enough to resist vehicle traffic, are weather resistant and can tolerate extremes in temperature making them extremely versatile.

Weight Load testing: 3.35 tonne load applied to Rhino tiles, resting on a solid base. Load maintained for 2 hours. Rhino tile & floor surface showed no signs of damage.

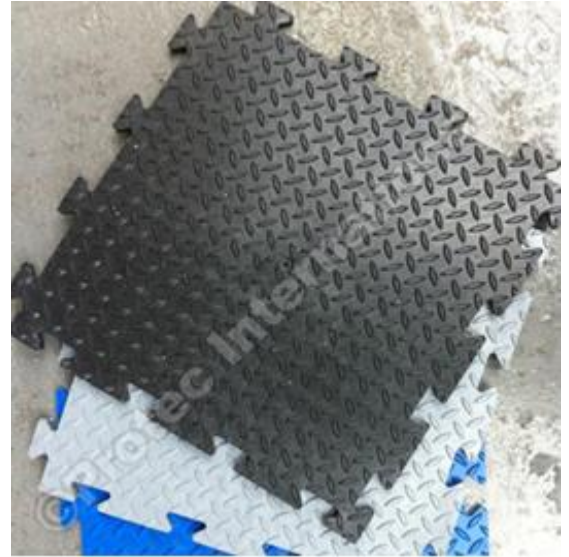

## Technical Specifications

Material	100% Recycled PVC
Size	500mmx500mmx14mm
Thickness/Density	14mm
Unit Weight	1.8kg
Markings	None
Colour	Black
Disposal	<a href="http://www.bremap.co.uk/">http://www.bremap.co.uk/</a>

## Features

- Interlocking mechanism, no need for tape
- Extremely durable absorbing impact and shock
- Perfect for heavy foot or vehicular traffic
- Easy to cut to shape if required
- 100% Recycled
- Easy to clean & can be used over and over again

## Guidelines for Use

- Rhino Tile is fixed together using an interlocking mechanism, so there is no need for taping together.
- Can be used inside or outside for temporary or semi-permanent applications.
- Ramp Edges can be purchased separately and provide non-trip access where needed. Ramp Edges come in male and female formats.
- Easy to cut to size with a jigsaw or Stanley knife.

Tel: **0800 834 704**

Email: [enquiries@protection.co.uk](mailto:enquiries@protection.co.uk) Web: [www.protection.co.uk](http://www.protection.co.uk)

Protec International Ltd, Construction House, Adlington Industrial Estate, Adlington, Cheshire SK10 4NL