




LIGHT DUTY RAMPS aluminium

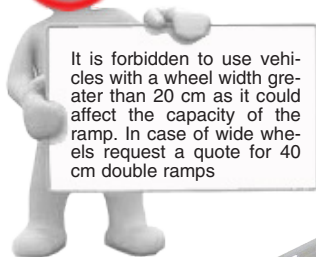

It is forbidden to use vehicles with a wheel width greater than 20 cm as it could affect the capacity of the ramp. In case of wide wheels request a quote for 40 cm double ramps

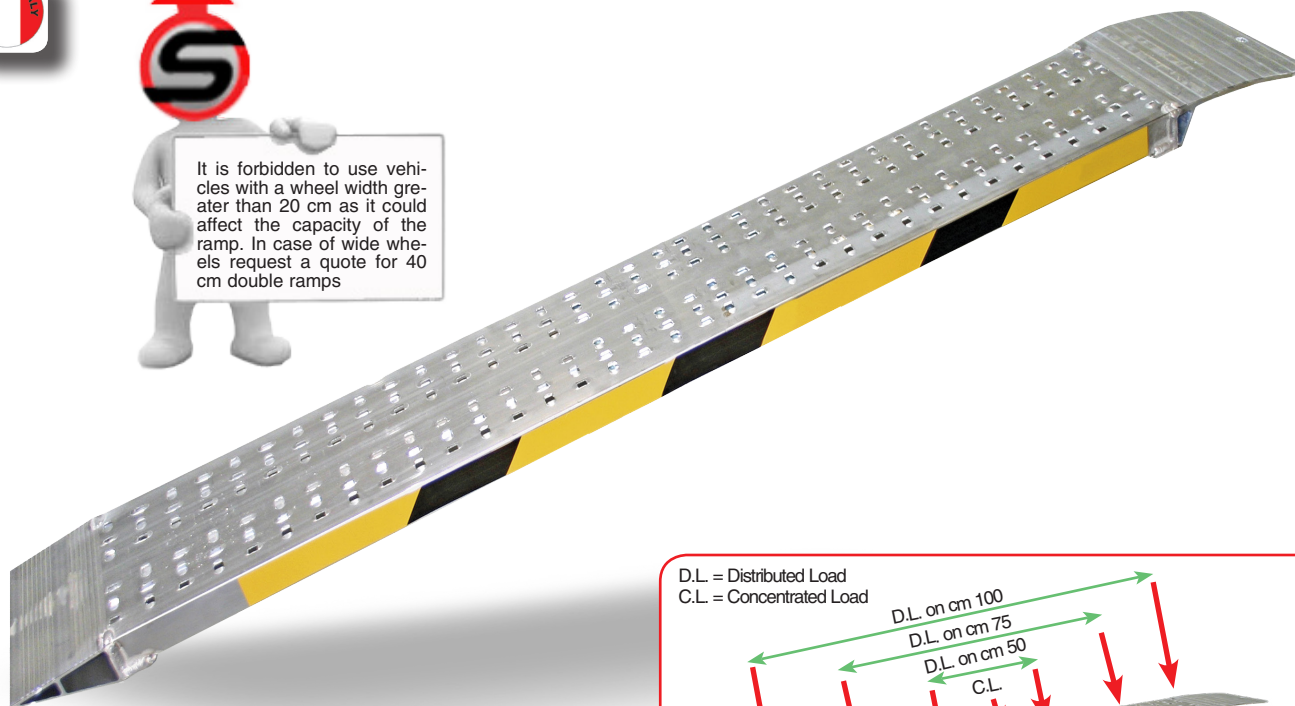

D.L. = Distributed Load
C.L. = Concentrated Load

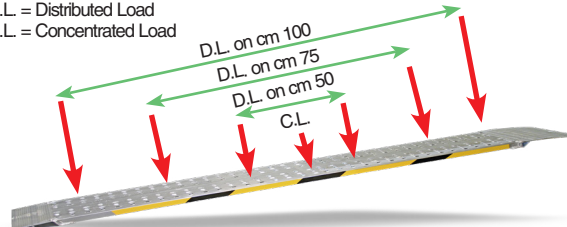

LIGHT ALUMINIUM RAMPS. The 35 mm profile allows us to produce a series of ramps very lightweight and comfortable for loading and unloading of small machines.

The knurled surface of the ramps ensures maximum grip.


The **FOLDING RAMPS** of 1.5 - 2.0 and 2.5 meters are ideal for small vehicles that can transport them easily.

Perfect for motorcycles, campers, vans, hobbies, gardening, cleaning machines, construction, quad, etc.

- Extruded reinforced aluminium structure
- Non-skid aluminium surface
- Ramp top with central hole to fix it to the vehicle
- Ramp end with triangular profile for easy climb of vehicles



Folding ramp

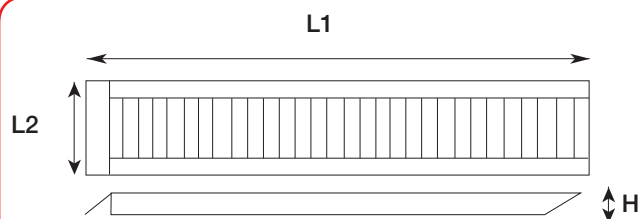

TYPE	L1 cm	conc. charge	Capacity (pair) Kg wheels distance			H cm	L2 cm	Weight each kg
			50 cm	75 cm	100 cm			
FIX RAMPS								
RL 15	150	522	756	936	1.048	3,5	20	4,0
RL 20	200	357	472	548	648	3,5	20	5,0
RL 25	250	250	316	356	400	3,5	20	6,0
RL 30	300	175	216	240	264	3,5	20	8,0
FOLDABLE RAMPS								
RLP15	150	389	570	700	780	3,5	20	5,0
RLP20	200	289	384	440	520	3,5	20	6,5
RLP25	250	229	292	328	364	3,5	20	7,5



Display for shops