

ANA1, High Noise Reduction Silencer - 40dB(A) ANA1-C12

Datasheet

General series information

The high noise reduction style silencer ANA1 keeps the noise level inside a plant below 85dB(A) with a noise reduction effect of 40dB(A). Series ANB1 has a noise reduction effect of 38dB(A) and has a larger effective area with the same port size as series ANA1. It is also available for common exhaust from manifolds.




Silencer

Standard specifications

Model	ANA1-C12 (Port Size Ø12 One-touch Fitting)
Pressure medium	Compressed Air
Maximum temperature of pressure medium	60 °C
Minimum temperature of pressure medium	5 °C
Maximum ambient temperature	60 °C
Minimum ambient temperature	5 °C
Pneumatic input connection	Ø 12 mm
Noise reduction	-40 dB (A)
Weight	0.019 Kg



Dimensions

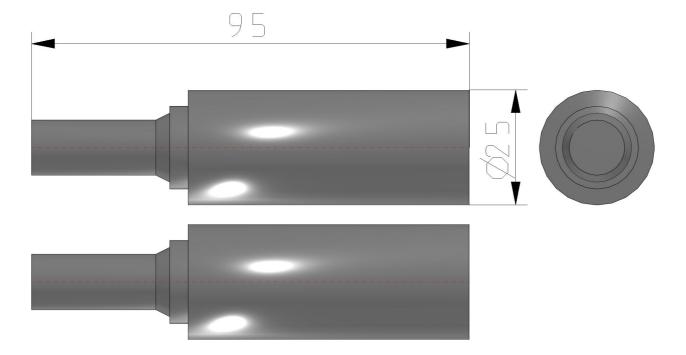

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



Additional information

Catalogue AN_EU.pdf

Operation manuals OM_AMX_OM-D023EN-D.pdf

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.