



## AN (BC Sintered), Silencer, General Purpose, Metric AN120-M3

### Datasheet

- Fluid: compressed air
- Maximum operating pressure: 1.0MPa
- Noise reduction: 13-21 dB(A)
- Effective area mm<sup>2</sup> : 1-20
- Ambient & fluid temperature: 5 - 50° C




*Silencer*

### Standard specifications

|                             |                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------|
| Size                        | 20 (Exhaust: Circumference, Noise Reduction: 13/18 dB, Effective Area 1/5 mm <sup>2</sup> ) |
| Port Size                   | M3                                                                                          |
| Pressure medium             | Compressed Air                                                                              |
| Maximum operating pressure  | 1.0 MPa                                                                                     |
| Maximum ambient temperature | 50 °C                                                                                       |
| Minimum ambient temperature | 5 °C                                                                                        |
| Noise reduction             | 13 dB                                                                                       |
| Effective Area              | 1 mm <sup>2</sup>                                                                           |
| Weight                      | 0.001 Kg                                                                                    |

Dimensions

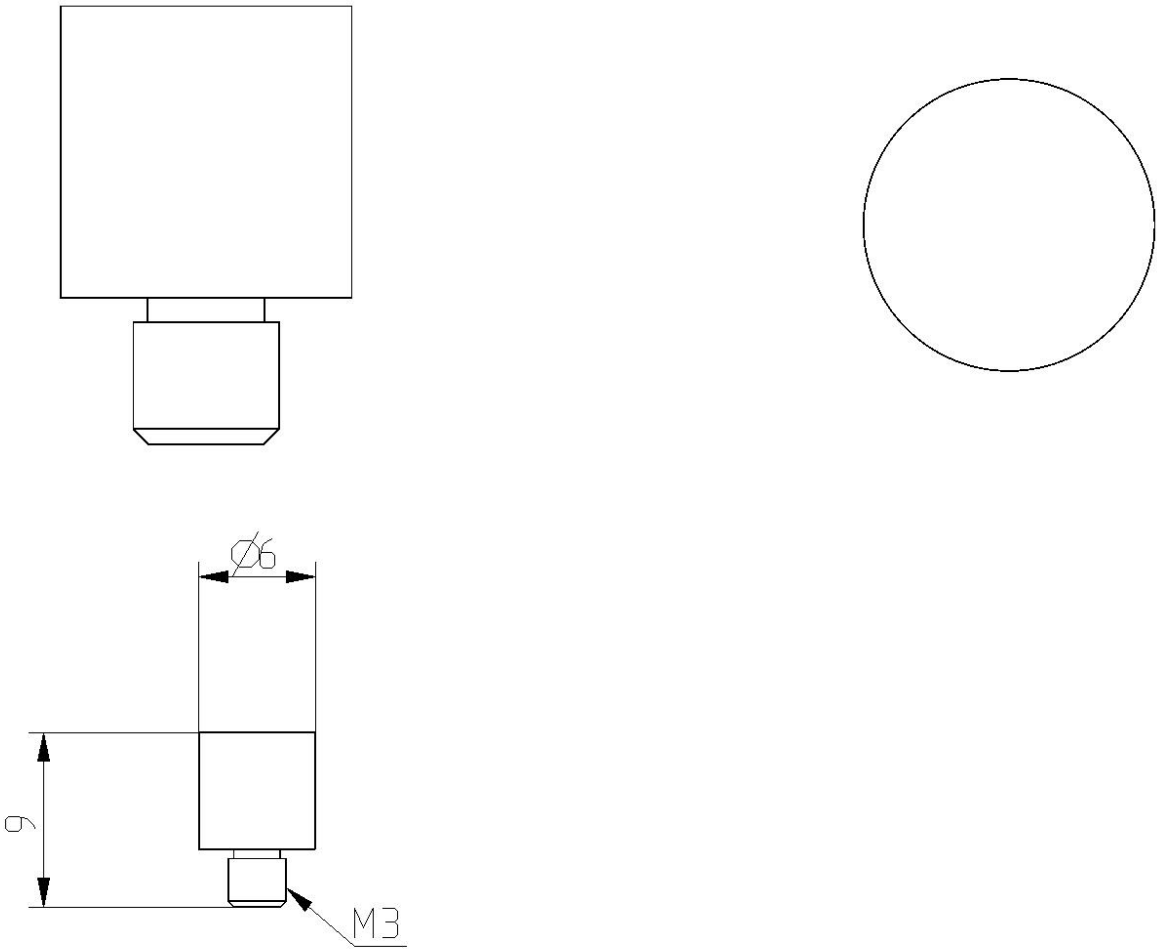

## Additional information

Catalogue

[AN\\_EU.pdf](#)