

MSQ*10~200, Rotary Table, Rack & Pinion, Basic & High Precision MSQB100A

Datasheet

The MSQ compact rotary table is ideal for material transfer applications. It incorporates load bearings and a mounting face with a rack-and-pinion style rotary actuator. The seven sizes are 10, 20, 30, 50, 70, 100, and 200 with rotational adjustments from 0-190 degrees, and auto switch capability. Additional features include a hollow shaft and direct load mounting possibility.



Semi-rotary actuator, double acting


Standard specifications


Clean Series	None			
Model	MSQ			
Precision	B (Basic)			
Size	100			
Suffix	A (Adjuster Bolt)			
Auto Switch	No Switch			
Lead Wire or Prewired Connector	0.5m [Or None in the Case of No Switch]			
Number	2 pcs. [Or None in the Case of No Switch]			
Thread Type	M5 [10,20]			
Rc 1/8 [30,50,70,100,200]				
Pressure medium	Compressed air (non-lube)			
Maximum temperature of pressure medium	60 °C			
Minimum temperature of pressure medium	0 °C			
Maximum operating pressure	1.0 Mpa			
F007-MIN_OP_PRESSURE	0.1 MPa			
Maximum ambient temperature	60 °C			
Minimum ambient temperature	0 °C			
Numbero of pneumatic connections	4 pcs.			
Pneumatic input connection	R 1/8			
Mode of operation of drive	Double acting			





Type of cushioning	Rubber bumper		
-	0° to 190°		
Weight	4.100 Kg		


Dimensions

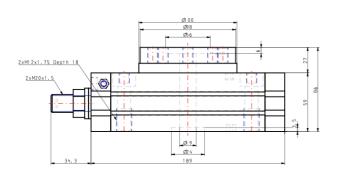

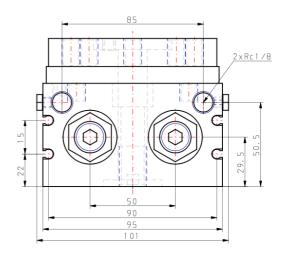

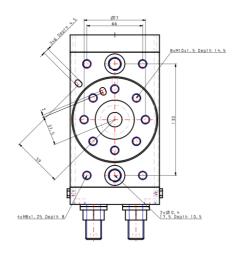

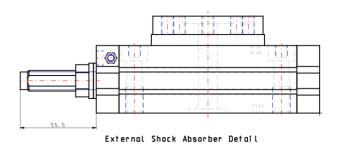






High Precision Detail




Constructions



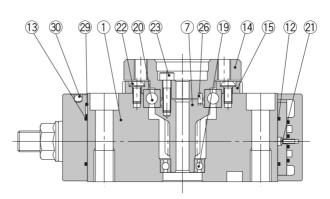



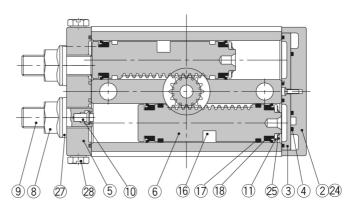

Parts list

	0			
No.	Descriptio	Material		
1	Body		Aluminium alloy	
2	Cover		Aluminium alloy	
3	Plate		Aluminium alloy	
4	Seal		NBR	
5	End cover		Aluminium alloy	
6	Piston		Stainless steel	
7	Pinion		Chrome molybdenum steel	
	Hexagon nut with flange Size: 10 to 50		Steel wire	
8	Hexagon nut	Size: 70 to 200	Sieel Wife	
9	Adjustment bolt	Chrome molybdenum steel		
10	Cushion pad		Rubber material	
11	Seal retainer		Aluminium alloy	
12	Gasket		NBR	
13	Gasket		NBR	
14	Table		Aluminium alloy	
15	Bearing retainer		Aluminium alloy	
16	Magnet		Magnetic material	
17	Wear ring	Resin		
18	Piston seal		NBR	
	· · · · · · · · · · · · · · · · · · ·			

No.	Descrip	Material		
	Deep groove ball bearing	Size: 10 to 50	Bearing steel	
19	Needle bearing	Size: 70 to 200	Dearing steel	
00	Deep groove ball bearing	Basic type	Bearing steel	
20	Angular contact ball bearing	Dearing steel		
21	Round head philips screw	Steel wire		
	Round head philips screw	Size: 10	Stainless steel	
22	Low head cap screw Size: 20 to 50		Chrome molybdenum steel	
	Hexagon socket head set bolt	Size: 70 to 200	Chilome morybuenum steer	
23	Hexagon socket head set	Stainless steel		
24	Hexagon socket	Size: 10 to 50	Stainless steel	
24	head set bolt	Size: 70 to 200	Carbon steel	
25	CS type snap ring	Spring steel		
26	Parallel pin	Size: 10 to 50	Carbon steel	
20	Parallel key	Size: 70 to 200	Carbon steel	
27	Seal washer		NBR	
28	Plug	Brass		
29	O-ring	Size: 70 to 200 only	NBR	
30	Steel balls	Size: 70 to 200 only	Stainless steel	
31	Shock absorber	_		

Replacement parts

Description		Kit no.					NI-A-	
	10	20	30	50	70	100	200	Note
Seal kit	KT-MSQ10	KT-MSQ20	KT-MSQ30	KT-MSQ50	KT-MSQ70	KT-MSQ100	KT-MSQ200	A set of above numbers 4, 12, 13, 17, 18 and 27



Additional information

Catalogue

MSQ_EU.pdf

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.