


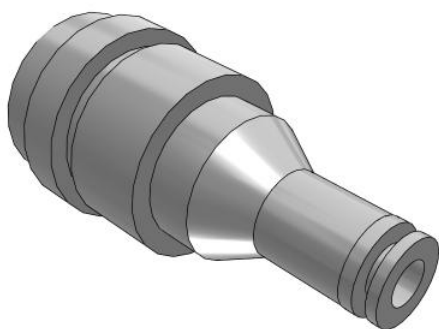

## KK\*S-\*H, S-Couplers, Straight Type with One-touch Fitting KK4S-06H




### Datasheet

- Straight Type with One-touch Fitting.
- Body size: M5, 1/8, 1/4, 1/2.
- Applicable Tubing O.D.: Ø3.2, Ø4, Ø6, Ø8, Ø10, Ø12, Ø16.

### Standard specifications

|                            |                                                                               |
|----------------------------|-------------------------------------------------------------------------------|
| Body Size                  | 4 (1/4)                                                                       |
| Applicable Tubing O.D.     | Ø6 mm                                                                         |
| -                          | Air, Water                                                                    |
| Maximum operating pressure | 1.0 MPa                                                                       |
| Minimum operating pressure | 0 kPa                                                                         |
| Proof pressure             | 1.5 MPa                                                                       |
| Effective Area             | 39 mm <sup>2</sup>                                                            |
| Sealing principle          | Electroless nickel plated (copper-free application), With male thread sealant |
| Weight                     | 0.048 Kg                                                                      |

Dimensions

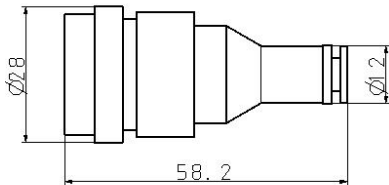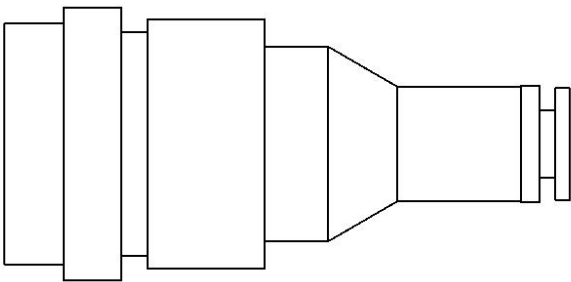

## Additional information

Catalogue

[KK-C\\_EU.pdf](#)