


C(D)QM, Compact Cylinder, Guide Rod Type CDQMB16-5

Datasheet

- Guide rod type compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard strokes (mm): 5 to 100
- 4 times the lateral load resistance of the CQ2K
- Non-rotating accuracy 0.2 or less



Double-acting cylinder with cushioning adjustable at both ends, single piston rod

Standard specifications

Magnet	D (Built-in)		
Mounting	B [Through Hole (Standard)]		
Bore Size	Ø16 mm		
Port Thread	M Thread; Rc		
Stroke	5 mm		
Auto Switch	No Switch		
Lead Wire or Prewired Connector	0.5 m		
Number	2 pcs.		
-	Compressed air		
Maximum temperature of pressure medium with magnet	60 °C		
Minimum temperature of pressure medium with magnet	-10 °C (with no freezing)		
Maximum operating pressure	1.0 MPa		
Minimum operating pressure	0.12 MPa		
Proof pressure	1.5 MPa		
Maximum ambient temperature with magnet	60 °C		
Minimum ambient temperature with magnet	-10 °C (with no freezing)		
Pneumatic input connection	M5		
Pneumatic exhaust connection	M5		
Theoretical cylinder force, advance stroke (at 0.5 MPa)	101		





Theoretical cylinder force, return stroke (at 0.5 MPa)	75
Maximum piston speed	500 mm/s
Type of cushioning	Rubber bumper on both ends
Piston rod end	Without thread
Non-rotating accuracy of plate	± 0.2 °
Allowable rotational torque	0.15N·m


Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



Dimensions



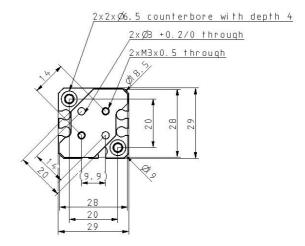






Constructions

ø12 to ø25

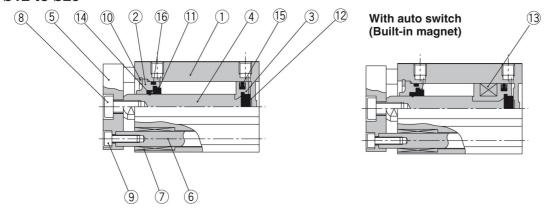

Component Parts

No.	Description	Material	Note
1	Cylinder tube	Aluminium alloy	Hard anodised
2	Collar	Aluminium alloy	Anodised
3	Piston	Aluminium alloy	Chromated
4	Piston rod	Stainless steel	
5	Plate	Aluminium alloy	Anodized
6	Guide rod	Stainless steel	Hard chrome plated
7	Bushing	Oil-impregnated sintered alloy	
8	Hexagon socket head cap screw	Carbon steel	Nickel plated
9	Hexagon socket head cap screw	Carbon steel	Nickel plated
10	Snap ring	Carbon tool steel	Phosphate coated
11	Bumper A	Urethan	
12	Bumper B	Urethan	
13	Magnet	_	
14	Rod seal	NBR	
15	Piston seal	NBR	
16	Gasket	NBR	

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



Additional information

Catalogue CQM_EU.pdf

Operation manuals cqm_op_manual_cqm_-om0001c.pdf

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.