

# CY3B, Rodless Cylinder, Magnetically Coupled, (Basic) CY3B15-100

**Datasheet** 

### **General series information**

- · Magnetically coupled rodless cylinder
- Basic Type
- Bore sizes (mm): 6, 10, 15, 20, 25, 32, 40, 50, 63
- Maximum operating pressure: 0.7MPa
  Ambient temperature: -10 to 60°C




Magnetically coupled rodless cylinder

# **Standard specifications**

| Bore Size                     | 15mm  |
|-------------------------------|---|
| Port Thread                   | M Thread: 6 to 15 Bore; Rc: 20 to 63 Bore                       |
| Stroke                        | 100   |
| Made to Order                 | None  |
| Maximum operating pressure    | 0.7 MPa   |
| Minimum operating pressure    | 0.16 MPa  |
| Proof pressure                | 1.05 MPa  |
| Type of cushioning            | Rubber bumper on both ends                                      |
| Lubrication                   | Non-lube  |
| Fluid                         | Air   |
| Ambient and fluid temperature | -10 - 60°C  |
| Stroke length tolerance       | 0 to 250 st: +1.0/0, 251 to 1000 st: +1.4/0, 1001 st to: +1.8/0 |
| F452 - Magnetic Holding Force | 137 N   |
| Piston speed                  | 50 - 500 mm/s   |
| F454 - Mounting orientation   | Horizontal, Inclined, Vertical                                  |
| Mounting nut (2 pcs.)         | Standard equipment (accessory)                                  |
| Weight                        | 0.305 Kg  |

## **Dimensions**



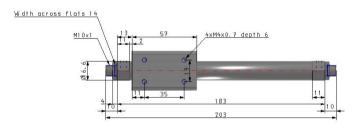











## **Constructions**

### CY3B10, 15

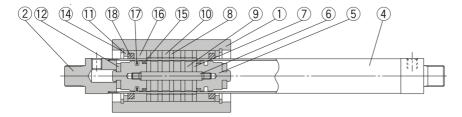



#### **Component Parts**

| No.          | Description               | Material                    |                | Note                                |                       |
|--------------|---------------------------|-----------------------------|----------------|-------------------------------------|-----------------------|
| 1            | Body                      | Aluminum alloy              |                | Hard anodized                       |                       |
| 2 Head cover | Hood sover                | Ø 6, Ø 10                   | Brass          | Electroless Ni plated               |                       |
|              | nead cover                | Ø 15 to Ø 63 Aluminum alloy |                | ess ivi piateu                      |                       |
| 3            | End collar                | Aluminum alloy              |                | Ø 20 to Ø 40 only                   |                       |
| 4            | Cylinder tube             | Stainless steel             |                |                                     |                       |
| 5            | Piston                    | Ø 6 to Ø 15                 | Brass          | Ø 6 to Ø 15                         | Electroless Ni plated |
|              |                           | Ø 20 to Ø 63                | Aluminum alloy | Ø 20 to Ø 63                        | Chromated             |
| 6            | Shaft                     | Stainless steel             |                |                                     |                       |
| 7            | Piston side yoke          | Rolled steel                |                | Zinc chromated                      |                       |
| 8            | External slider side yoke | Rolled steel                |                | Zinc chromated                      |                       |
| 9            | Magnet A                  | Rare earth magnet           |                |                                     |                       |
| 10           | Magnet B                  | Rare earth magnet           |                |                                     |                       |
| 11           | Spacer                    | Aluminum alloy              |                | Black anodized (Ø 6: not available) |                       |
| 12           | Bumper                    | Urethane rubber             |                |                                     |                       |
| 13           | Piston nut                | Carbon steel                |                | Ø 6 to Ø 15: not available          |                       |
| 14           | C type snap ring for hole | Carbon tool steel           |                | Nickel plated                       |                       |
| 15           | Wear ring A               | Special resin               |                |                                     |                       |
| 16           | Wear ring B               | Special resin               |                |                                     |                       |
| 17           | Piston seal               | NBR                         |                |                                     |                       |
| 18           | Lubretainer               | Special resin               |                | Ø 6: not available                  |                       |
| 19           | Cylinder tube gasket      | NBR                         |                | Ø 6, Ø 10 only                      |                       |



## **Additional information**

Catalogue CY3-C\_EU.pdf

Operation manuals OM\_CYBx\_OM0001EN-A.pdf

 $OM\_CYRx\_OM0001EN-A.pdf$ 

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.