

# Single Action - VHS
## VHS50-F10A

Datasheet

- With locking holes
- Port sizes: 1/8, 1/4, 3/8, 1/2, 3/4, 1"
- Thread Types: Rc, NPT, G.

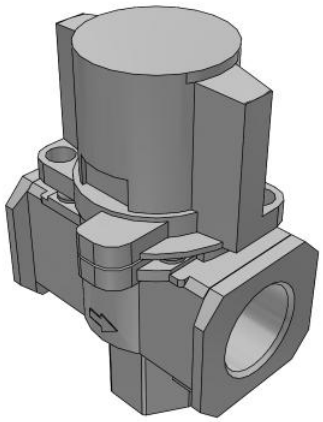


*Directional control valve 3/2-way valve, closed normal position With mechanical control spring, with mechanical component detent control Return with general manual control*

## Standard specifications

| | |
|---|---|
| Body Size | 50 |
| Thread | F (G) |
| Port Size | 10 (1) |
| Handle/Bonnet Material | A (Flame Resistant PBT) |
| Options | None |
| Semi-standard | None |
| Made to Order | None |
| Pressure medium | Air |
| Maximum operating pressure | 1.0 MPa |
| Minimum operating pressure | 0.01 MPa |
| Proof pressure | 1.5 MPa |
| Maximum ambient temperature | 60 °C |
| Minimum ambient temperature | -5 °C (No freezing) |
| Conform to the European RoHS Directive | Conform |
| Approvals | No need |
| Paint colour | Hangle: Red<br>Body: White |
| Handle switching angle | 90º |
| Weight | 0.532 Kg |

*Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.*



SMC CORPORATION +34 945184126 emcmarketing@smc.smces.es

# Dimensions










Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

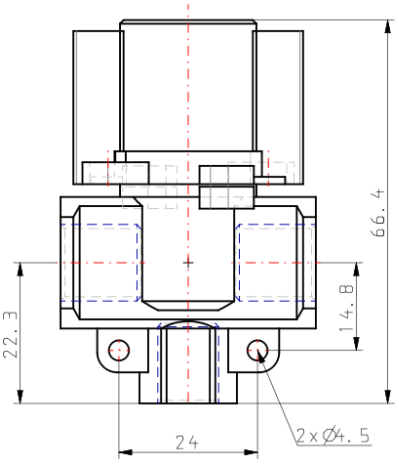

SMC CORPORATION +34 945184126 emcmarketing@smc.smces.es
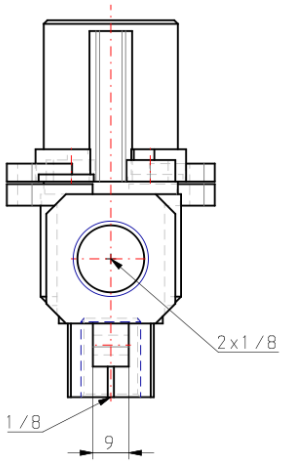
## Additional information
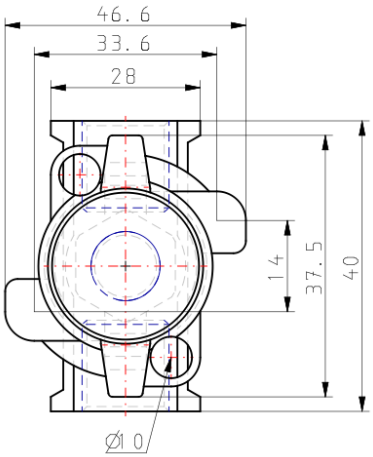
| | |
|---|---|
| Catalogue | VHS-A_EU.pdf |
| Declaration of conformity | newDoc_VHS-A_TF1V403EN-A.pdf |
| Operation manuals | OM_VHS_Q0023EN-B.pdf |

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



SMC CORPORATION +34 945184126 emcmarketing@smc.smces.es