



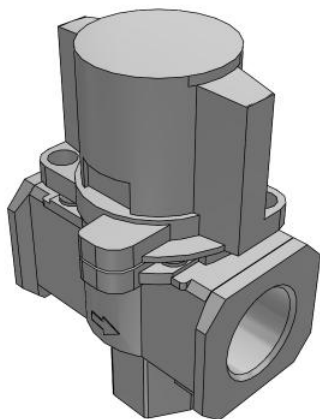

Single Action - VHS VHS50-F10B

Datasheet

- With locking holes
- Port sizes: 1/8, 1/4, 3/8, 1/2, 3/4, 1"
- Thread Types: Rc, NPT, G.




Directional control valve 3/2-way valve, closed normal position With mechanical control spring, with mechanical component detent control Return with general manual control

Standard specifications

Body Size	50
Thread	F (G)
Port Size	10 (1)
Handle/Bonnet Material	B (Aluminum)
Options	None
Semi-standard	None
Made to Order	None
Pressure medium	Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0.01 MPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	-5 °C (No freezing)
Conform to the European RoHS Directive	Conform
Approvals	No need
Paint colour	Handle: Red Body: White
Handle switching angle	90°
Weight	0.770 Kg

Dimensions

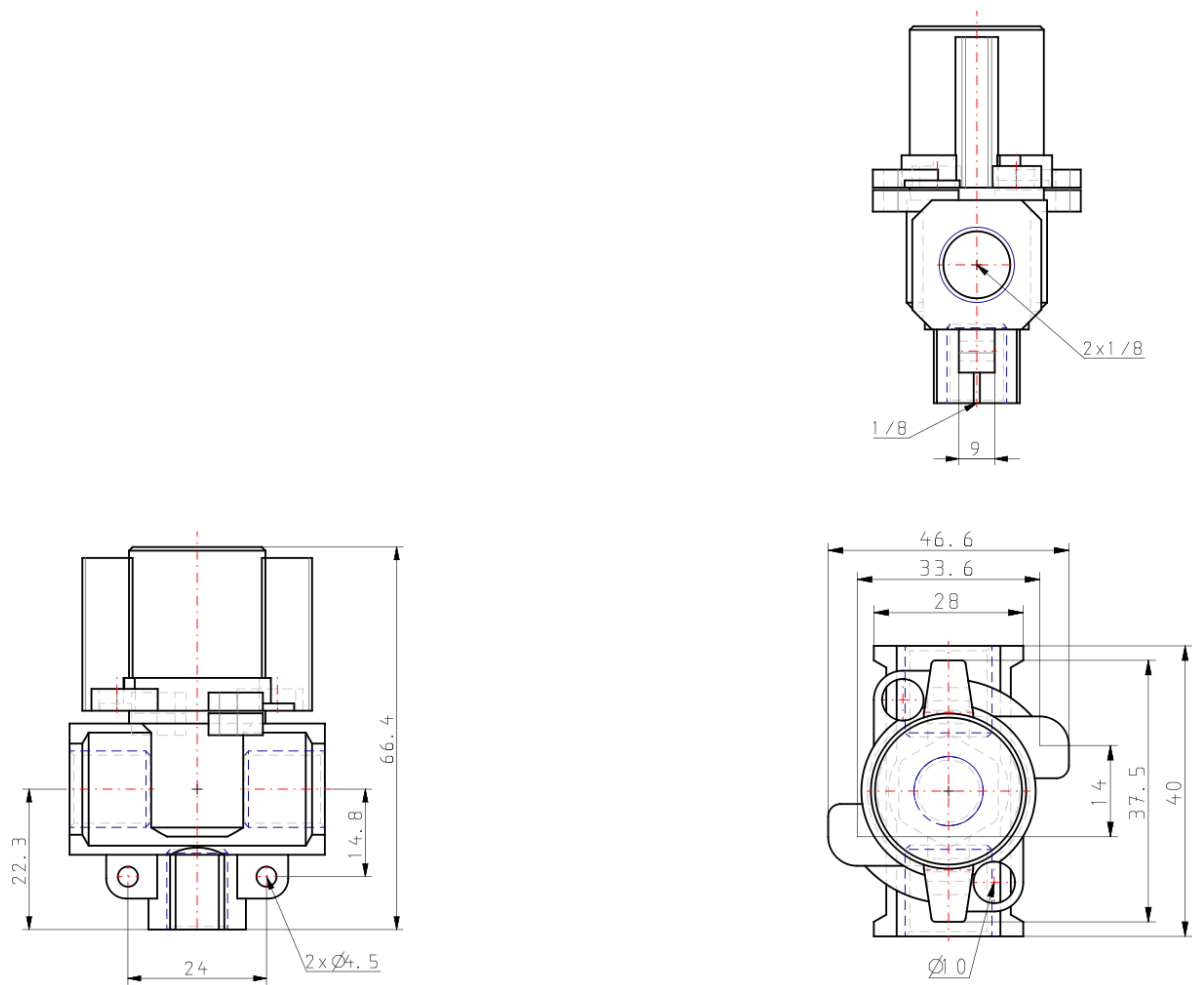

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Additional information

Catalogue	VHS-A_EU.pdf
Declaration of conformity	newDoc_VHS-A_TF1V403EN-A.pdf
Operation manuals	OM_VHS_Q0023EN-B.pdf