


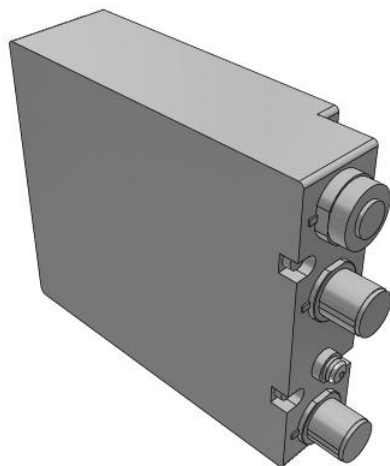

EX260, Integrated Type (For Output) Serial Transmission System EX260-SDN3

Datasheet


General Series Information

- Centralised & compact serial transmission system for output
- Compatible protocols: PROFI-safe, Ethernet POWERLINK, PROFINET, EtherNet/IP™, EtherCAT®, PROFIBUS DP, DeviceNet™, CC-Link, IO-Link, CANopen, Modbus, AS-Interface
- Up to 32 solenoids, up to 24 stations
- Applicable valve series: new SY, VQC, S0700, SV
- Up to IP67 enclosure compliant.

Standard specifications

Protocol	DN (DeviceNet)
Output Polarity/Communication Connector	3 [16 Outputs, -COM (PNP), M12 Connector]
Maximum ambient temperature	50 °C
Minimum ambient temperature	-10 °C
General power supply	24 VDC
Approvals	CE marking, UL (CSA) compatible
Weight	0.200 Kg

Dimensions

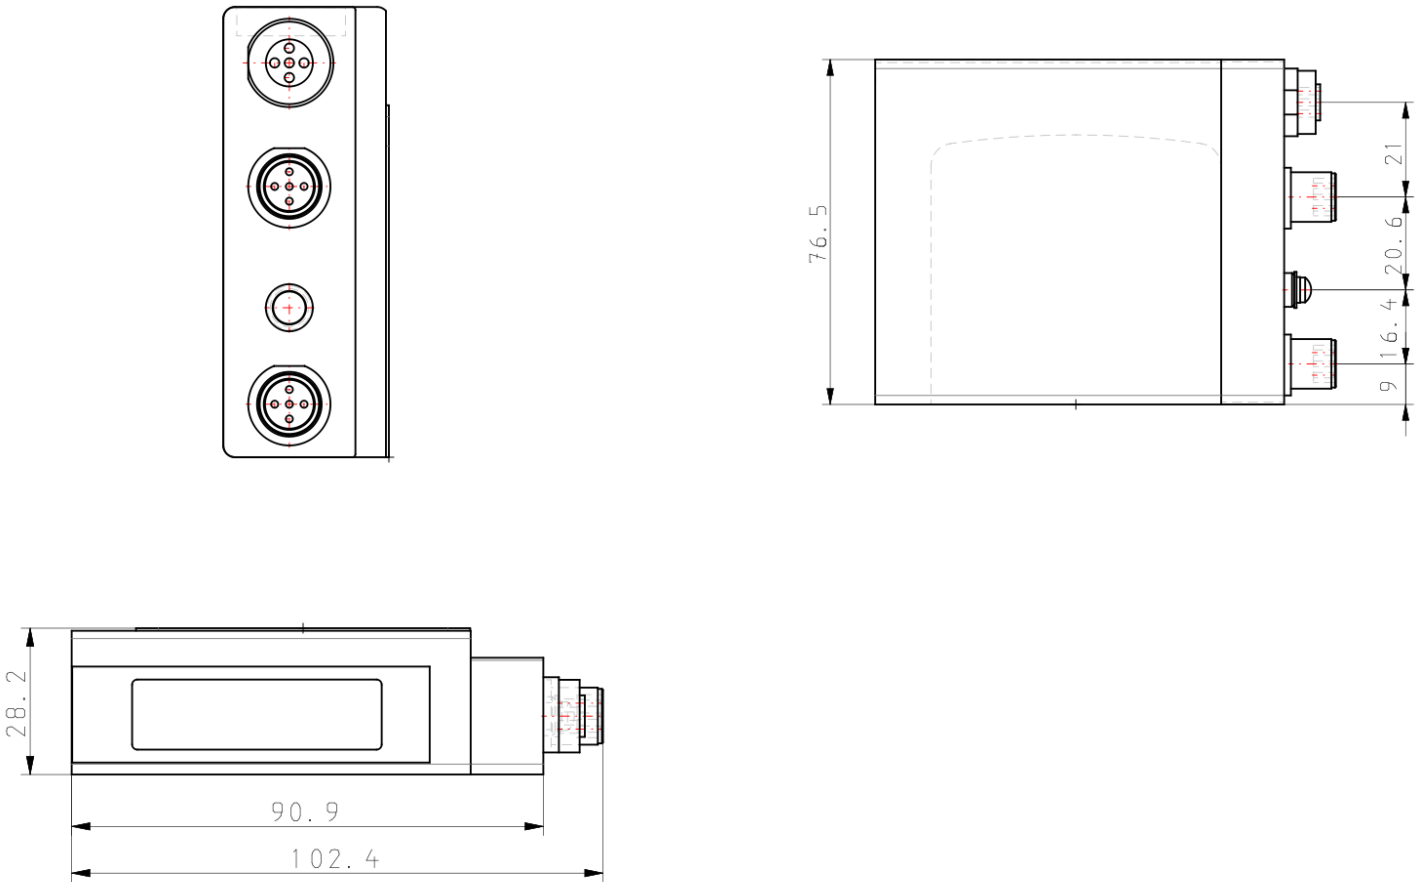

Additional information

Catalogue	EX260-D_EU.pdf
Declaration of conformity	newDoc_EX260-FPS1_TF1Y092EN.pdf newDoC_EX260_TF1Z204EN.pdf newDoC_EX260_TF1V137EN-A.pdf
Installation manuals	IM_EX260-SEC_TF2Z156EN.pdf IM_EX260-SIL1_TF2Z186EN.pdf IM_EX260-SMJ_TF2Z169EN.pdf IM_EX260-SPL_TF2Z183EN.pdf IM_EX260-SPN_TF2Z167EN.pdf IM_EX260-SDN_TF2Z155EN.pdf IM_EX260-SEN_TF2Z172EN.pdf IM_EX260-FPS1_SMY114EN.pdf
Operation manuals	quick-guide_EX260-SMJx_EN.pdf Quick-guide_EX260-SPNx_PROFINET_EN.pdf Quick-guide_EX260-SPLx_POWERLINK_EN.pdf OM_EX260-SPLx_POWERLINK_EN.pdf OM_EX260-SDNx_DeviceNet_EN-G.pdf OM_EX260-SPRx_PROFIBUS-DP_EN.pdf Quick-guide_EX260-SENx_EtherNetIP_EN.pdf OM_EX9_ZSW-IPC2_OMV1027EN-A.pdf OM_EX260-FPS1_PROFIsafe_EN-B.pdf Quick-guide_EX260-SDNx_DeviceNet_EN.pdf OM_EX260-SPNx_PROFINET_EN-D.pdf