

PULL CYLINDERS



LARZEP advantages

- Capacity from 5 to 50 Tn, stroke up to 150 mm.
- T and TE models are Spring Return. TD models are Double Acting.
- For pulling applications: to hook and join plates for welding, tensioning cables, etc.
- Optional rubber rod cover for piston protection extends cylinder life.
- Optional telescopic metallic rod cover especially suitable for welding applications.
- T series pull cylinders are available as options for the CA series maintenance sets. Plunger and base threads match the CA series accessories.

* Models equipped with metallic rod cover have a 30 mm shorter stroke.



Carefully read and understand the safety instructions.




Capacity		Stroke	Model	Oil Cap.	A	
Tn	kN	mm	LARZEP	cm ³	mm	
5	54	140	T00514/5G	110	306	
		140	T00514/10G	110	306	
10	93	140	T01015	190	308	
		150*	TE01015	204	576*	
		150*	TD01015	356	576*	
30	302	150*	TE03015	660	723*	
		150*	TD03015	954	723*	
50	483	150*	TE05015	1.056	757*	
		150*	TD05015	1.425	757*	



Maintenance Unit.

Page. 164

PULL CYLINDERS






T
TE
TD

CYLINDERS

5-50 Tn.

700 bar

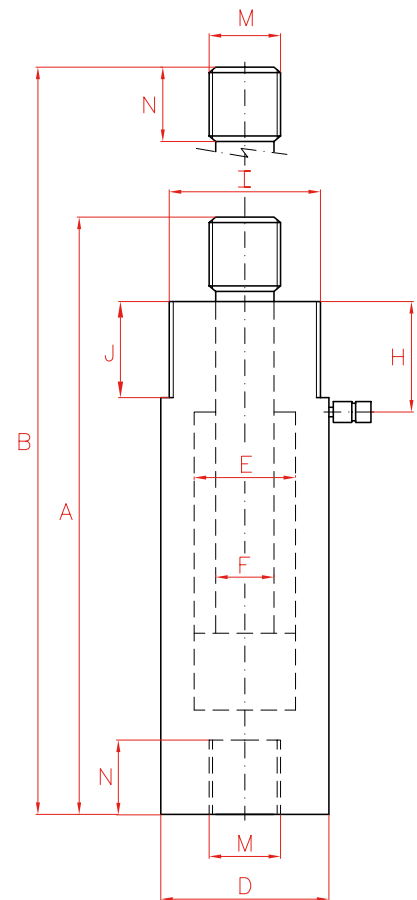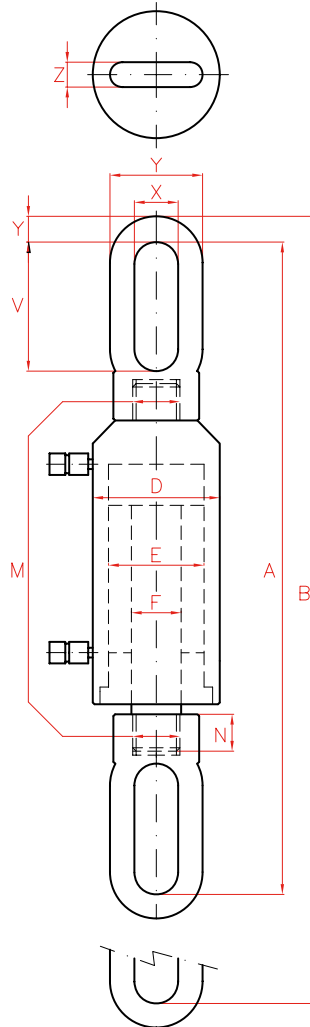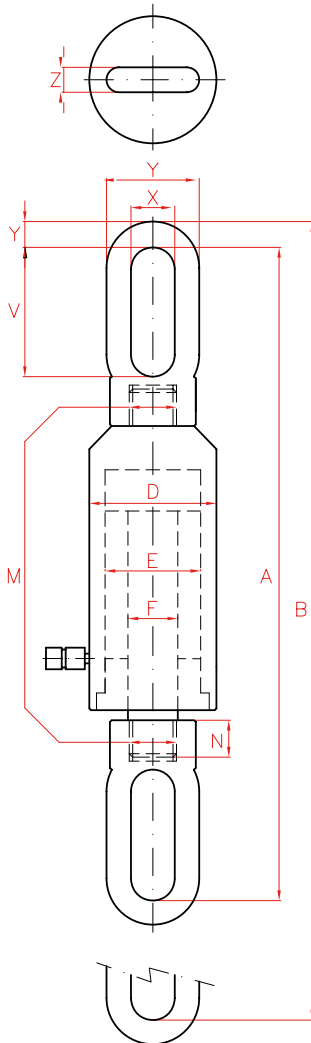

	B	D	E	F	M	N	I	J	H	U	V	X	Y	Z	Area	Weight	Model
	mm	mm	mm	mm		mm	UN	mm	mm	mm	mm	mm	mm	mm	cm ²	kg	LARZEP
	446	60	45	32	3/4" BSP	25	2 1/4" UNS	25	46	-	-	-	-	-	7,9	6,7	T00514/5G
	446	60	45	32	1 1/4" BSP	25	2 1/4" UNS	25	46	-	-	-	-	-	7,9	6,7	T00514/10G
	448	85	55	36	1 3/4" BSP	30	3 5/16" UNS	40	55	-	-	-	-	-	13,6	10,0	T01015
	726	86	55	36	M30x2	25	-	-	-	107	109	46	30,5	30,5	13,5	14,9	TE01015
	726	86	55	36	M30x2	25	-	-	-	107	109	46	30,5	30,5	13,5	14,9	TD01015
	873	125	90	50	M40x2	45	-	-	-	108	153	50	29	29	43,9	32,0	TE03015
	873	125	90	50	M40x2	45	-	-	-	108	153	50	29	29	43,9	32,0	TD03015
	907	148	110	56	M52x2	60	-	-	-	130	150	50	70	39	70,3	60,0	TE05015
	907	148	110	56	M52x2	60	-	-	-	130	150	50	70	39	70,3	60,0	TD05015