

GROOVED Grooved matting

29/09/2014



STANDARD MATTING

FEATURES

Non-slip surface.
Ribbed profiles.

ADVANTAGES

- Non-slippery
- Thermal and acoustic insulation
- Noise, vibration, and cold propagation reduction

BENEFITS

- Safety
- Comfort
- Economy

APPLICATIONS

Cutting pieces for vehicles step treads, shelves, or racks covers.



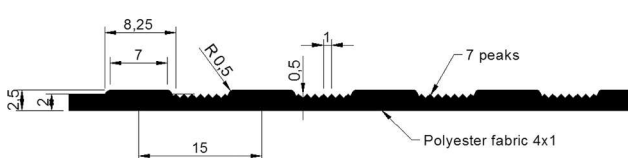



Cutting plates for protection of walls, columns, staircases, step stools, car trunks or vessels corridors.

Indoor installations.

www.trelleborg.com/elastomerlaminates

MECHANICAL, PHYSICAL AND CHEMICAL PROPERTIES

	Measured characteristics	Standard	Value
MECHANICAL			
	Rubber compound		SBR
	Hardness	ASTM D2240	70 ±5 Shore A
	Abrasion resistance (5N)	ISO 4649	≤250 mm ³

PROFILE	PATTERN
	 Fine triangular ribbed (MT)
	 Rectangular ribbed (MR)
	 Wide ribbed (MG)

DIMENSIONS

Colour	Thickness (mm)		Width (mm)		Length (m)		Weight (kg/m ²)	Pattern
●	3	±0.3	1000	±2%	10	±2%	3.6	MT
●	3	±0.3	1200	±2%	10	±2%	3.6	MT
●	2.5	±0.3	1500	±2%	15	±2%	3.3	MR
●	5.8	±0.5	1000	±2%	10	±2%	6.9	MG
●	5.8	±0.5	1200	±2%	10	±2%	6.9	MG

IDENTIFICATION

Branding	Without.
Back face	Fabric impression.
Packaging	Rolled on cardboard tube Ø 80mm.
Wrapping	Black polyethylene film.
Labelling	Self-adhesive label indicating product name, dimensions, area in m ² , nominal weight, and product code to allow product traceability.