


Product Datasheet

Alkaline

6LR61 Pro Power



6LR61PPG

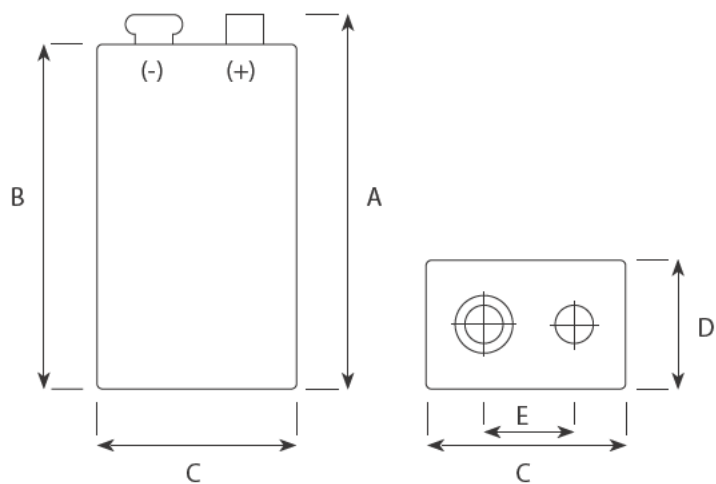

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	48,5	46,5
B	46,4	—
C	26,5	24,5
D	17,5	15,5
E	12,95	12,45

Name	9V / 6LR61 / 6AM6 / MN1604 / 1604A
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	9 Volt
Electrolyte	Potassium Hydroxide
Average weight	43 g
Storage temp. range	+15°C (59°F) ~ +25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ +55°C (131°F)
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel
Recommended cut off voltage	5,4V per battery

Typical discharge values

6LR61PPG

