



Suitable for medium frequency tools (50-400Hz)

Removable fingers





ISO 10819:2013
TRM=0,71, TRH=0,53

Cotton back lining
for spark protection

TOOL TYPE	IMPACT VIBRATION FLEXI	IMPACT VIBRATION AMPLITUDE	IMPACT VIBRATION+ WINTER	15-1 TRANSIENT VIBRATION
Rivet guns, Impact wrenches, Impact hammers				
High speed multi tools				
Angle grinders				
Sanders & Grinders				
Circular & Jig saws				

TRANSMISSION OF IMPACT VIBRATION FLEXI

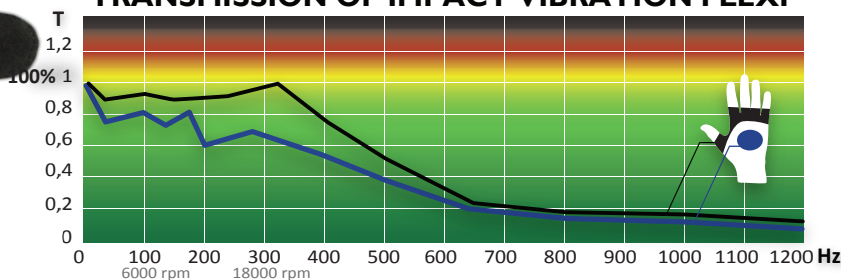

Suitable industries	
Abrasion	0  8000 cycles
Cut	ISO 13997: (X) (A-F) ANSI: (not tested) (A1-A9)
Tear	0  75 N
Puncture	0  150 N
Impact	 X
Needle	 25 gg: X
Heat	 X
Water & Oil	 X
Grip	Dry:  Wet/Oil: 
Breathing	Low  High

EN388



A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

ISO CUT (A-F)
A ≥ 2 N
B ≥ 5 N
C ≥ 10 N
D ≥ 15 N
E ≥ 22 N
F ≥ 30 N



Glove Purpose	Palm vibration protection
Name & Number	Impact Vibration Flexi - IMPVIBFLEXI
Materials	Polyamide, Polyester, Elastane, Cotton, PU, Elastic Polymer
Colour & Thickness	 Palm: 7,0 mm Back of hand: 1,6 mm
Size & Packing	 1 pairs 24 pairs / carton