
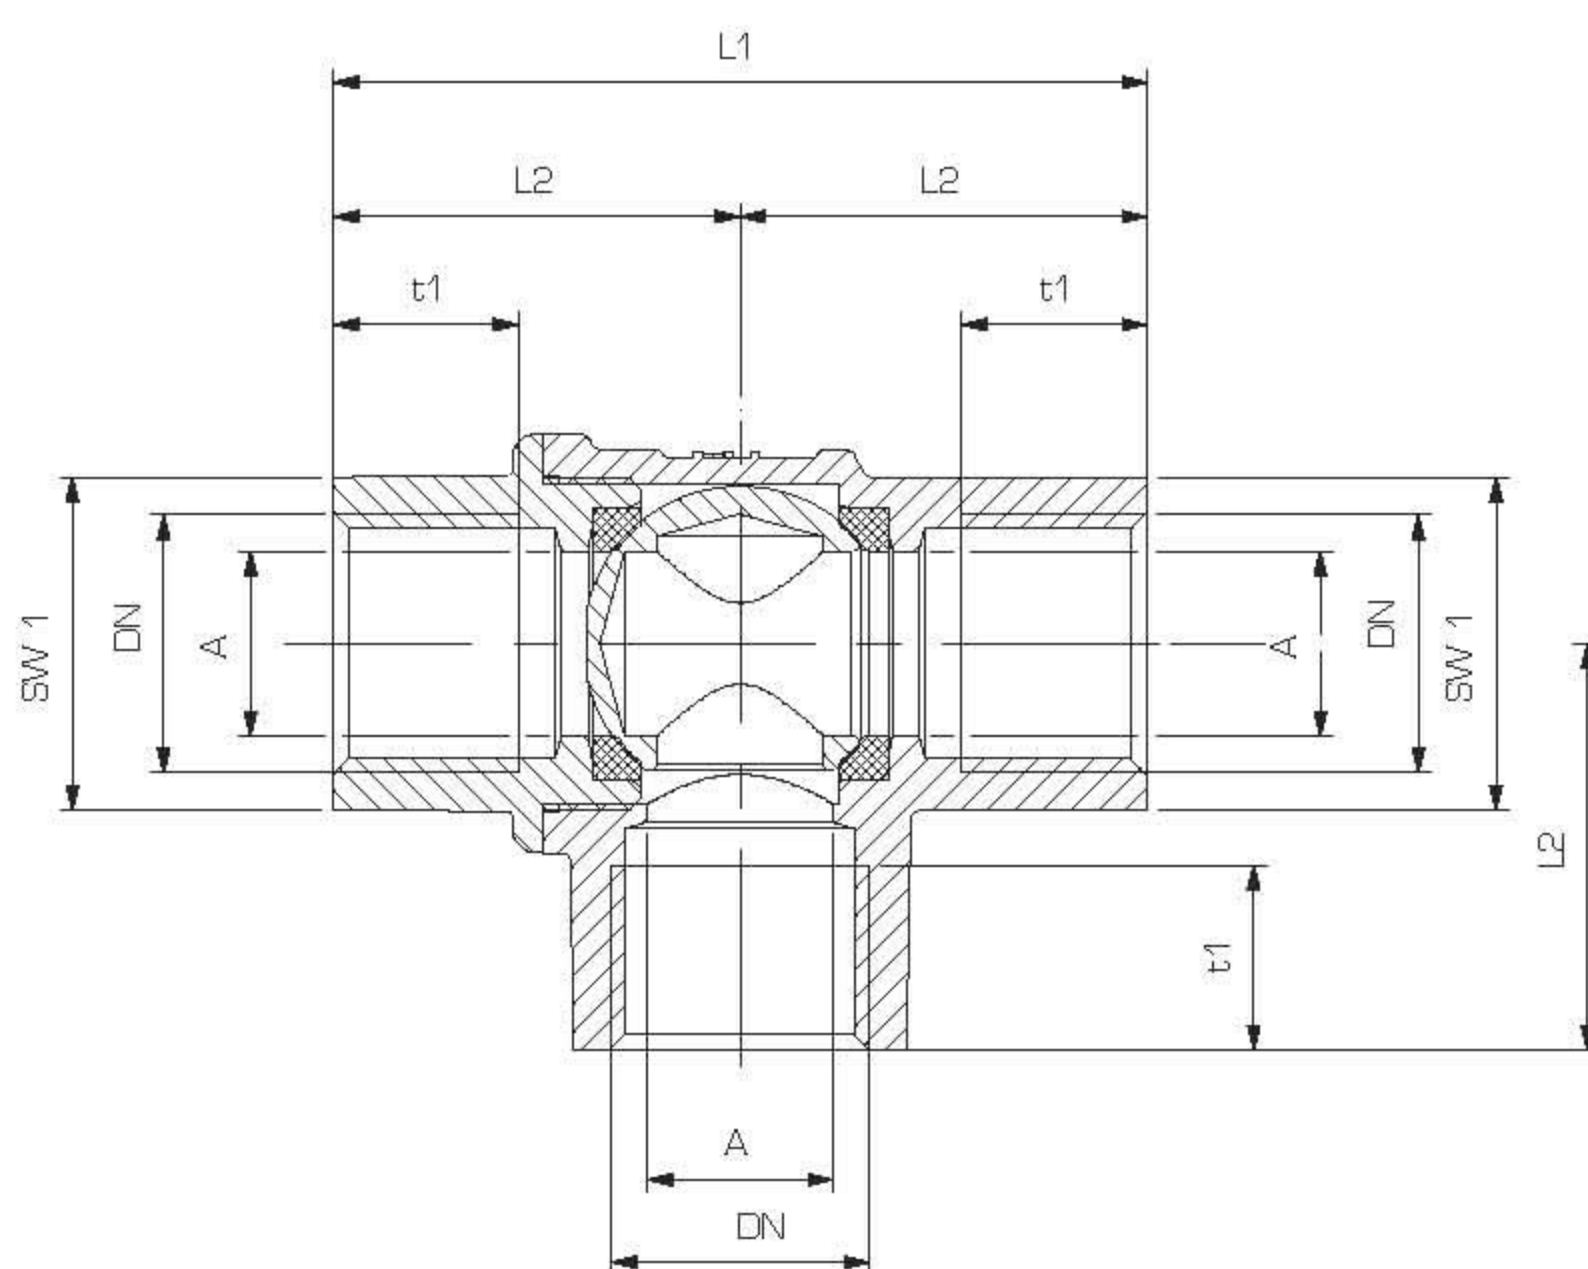




TECHNICAL DETAILS

3V

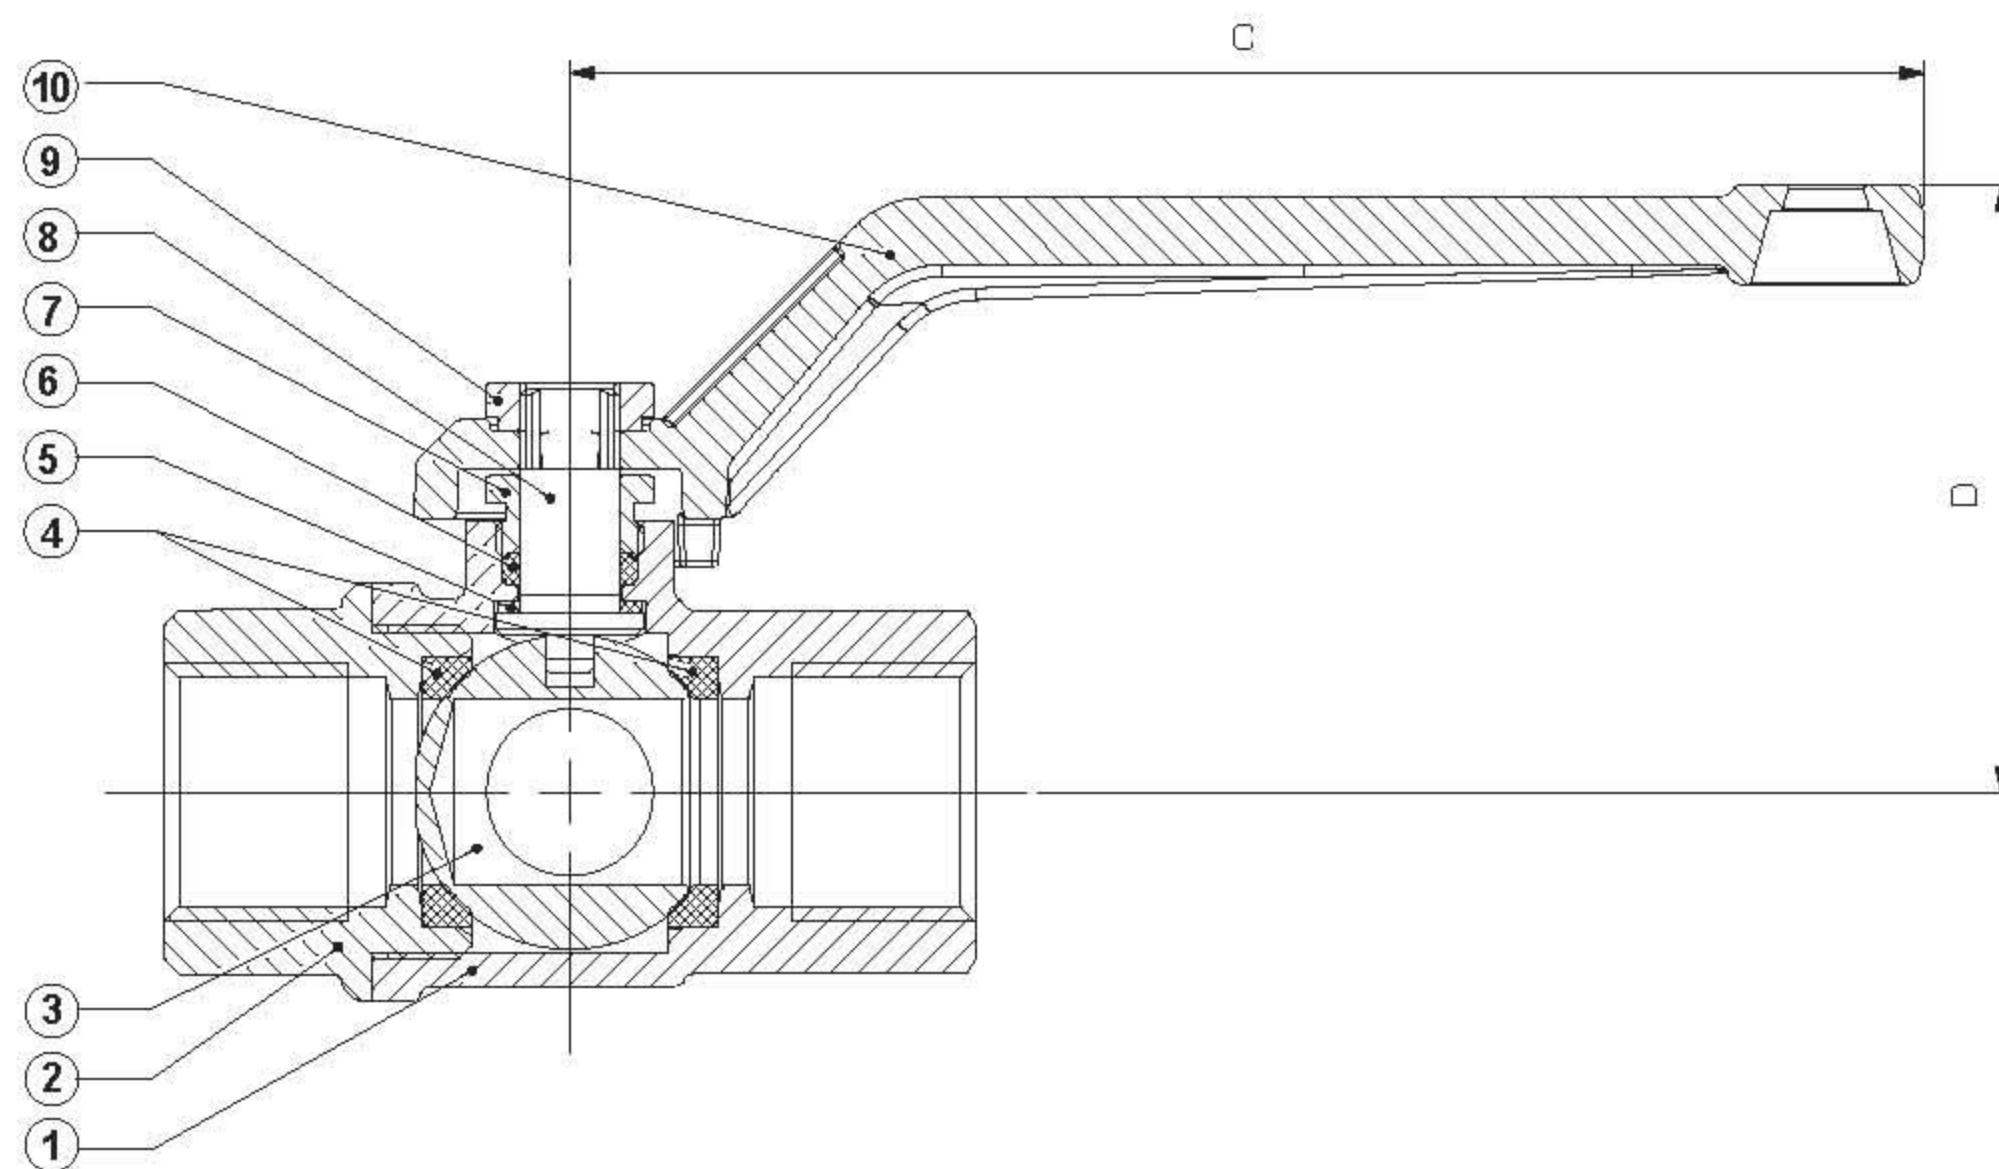


- ① Body in stamped brass CW617N
Corpo in ottone CW617N stampato
Körper aus Pressmessing CW617N
- ② Fitting in stamped brass CW617N
Raccordo in ottone CW617N stampato
Einschraubstück aus Pressmessing CW617N
- ③ Ball in chrome plated brass CW614N
Sfera in ottone CW614N cromata
Kugel aus Messing CW614N verchromt
- ④ Ball seat in PTFE N° 2 pieces for 3V,
in TFM N° 4 pieces for 3VN
Guarnizione sfera in PTFE N° per 3V,
in TFM N° 4 per 3VN
Kugeldichtung aus PTFE 2 St. für 3V,
aus TFM 4 St. für 3VN
- ⑤ Flat seal in PTFE
Guarnizione piatta in PTFE
Flachdichtung aus PTFE
- ⑥ Stem seal in PTFE
Guarnizione albero in PTFE
Spindeldichtung aus PTFE
- ⑦ Bush in brass CW614N
Bussola in ottone CW614N
Tüpfelle aus Messing CW614N
- ⑧ Stem in brass CW614N
Albero in ottone CW614N
Spindel aus Messing CW614N
- ⑨ Nut in brass CW614N
Dado in ottone CW614N
Mutter aus Messing CW614N
- ⑩ Handle
Maniglia
Griff


3 VN

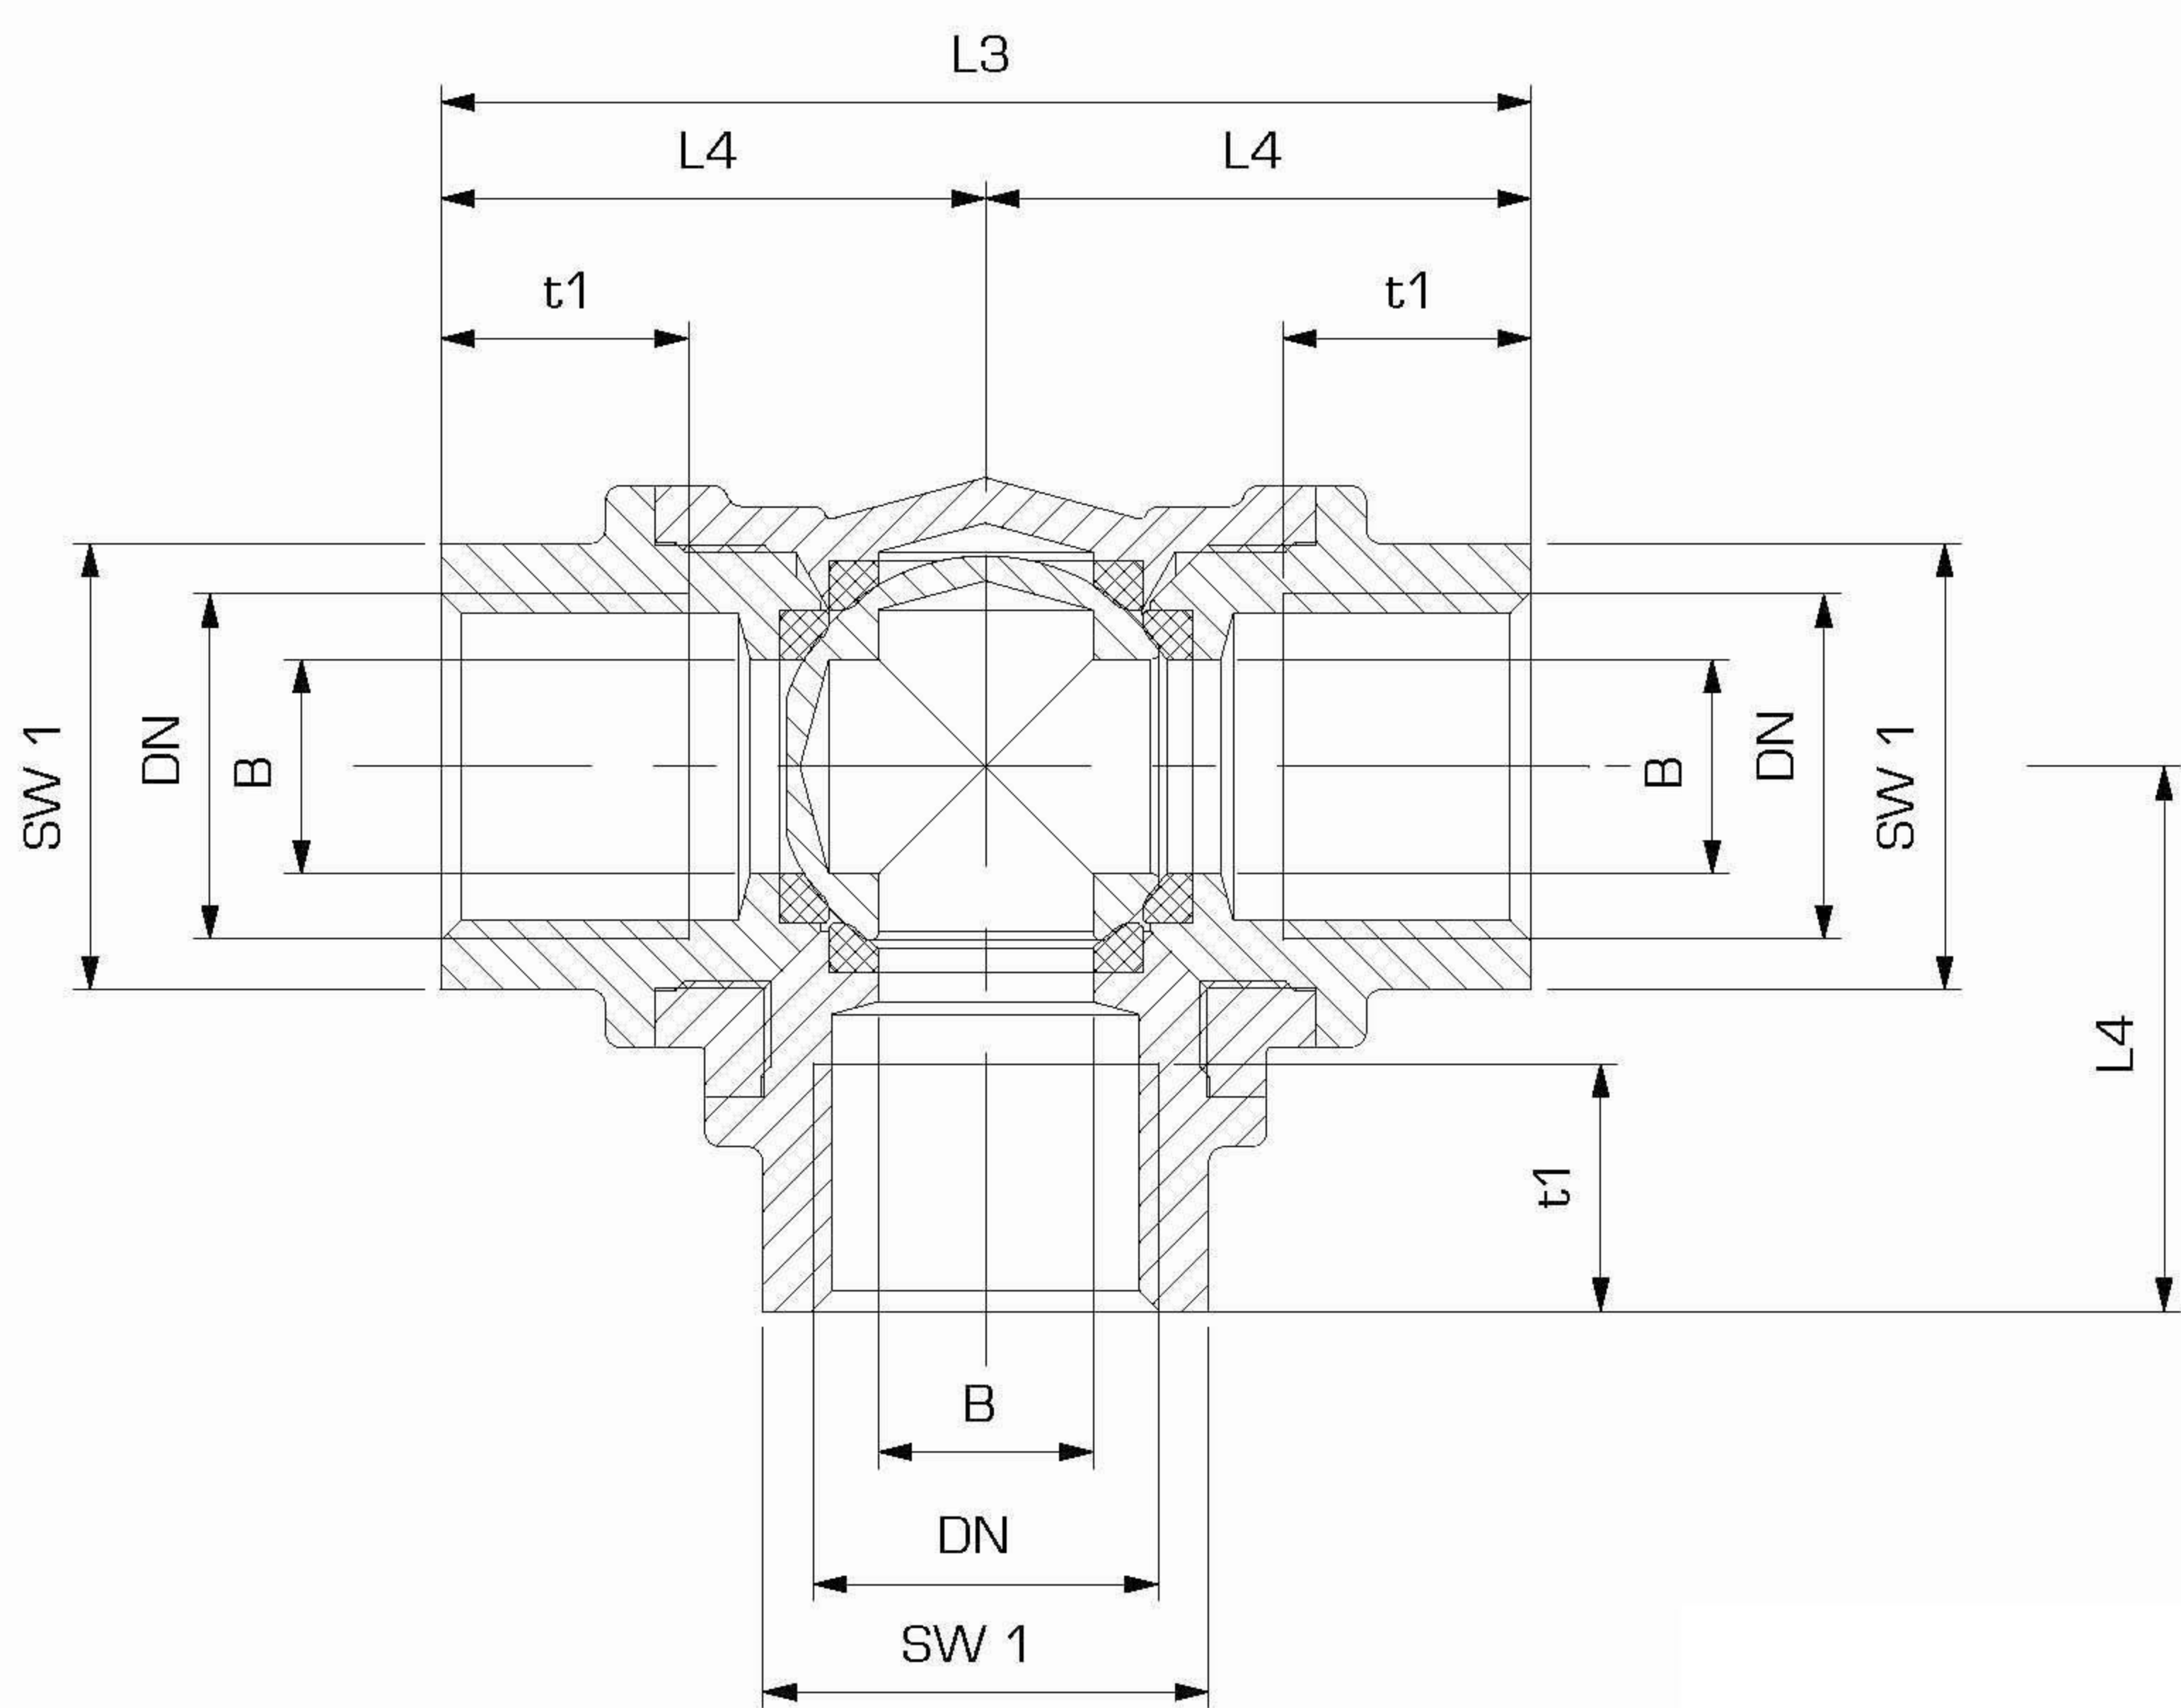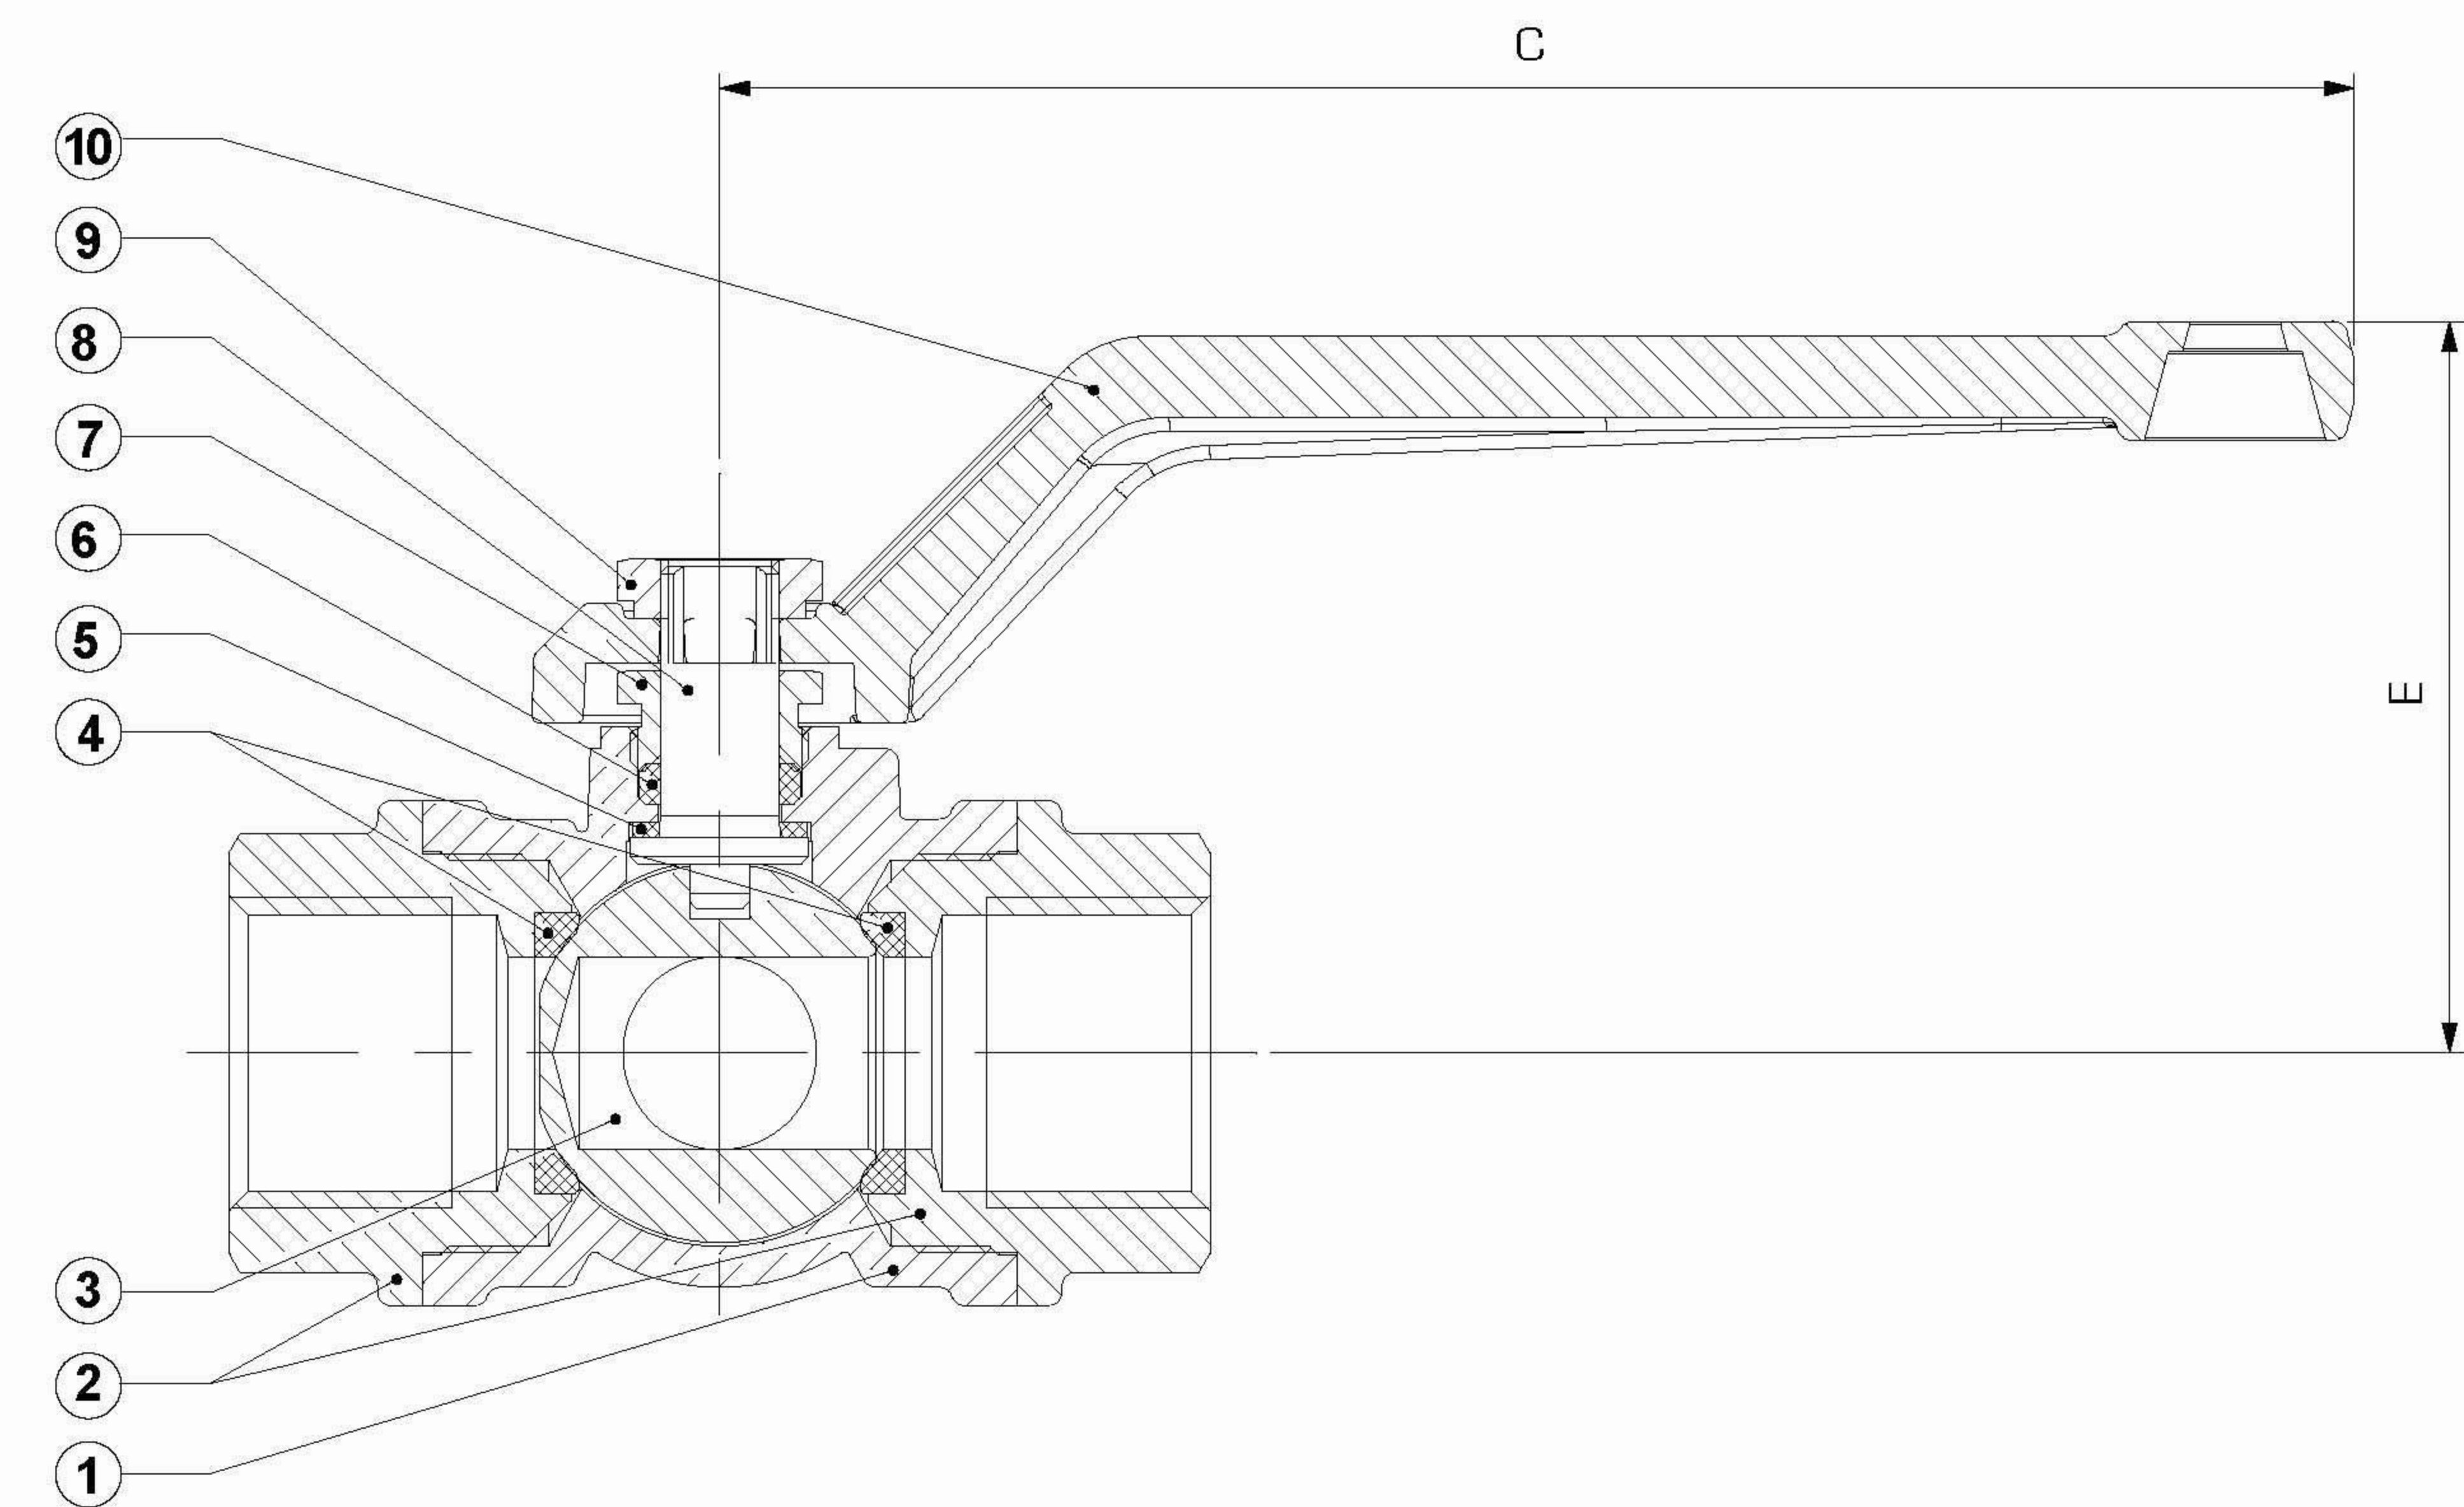

SFERA "T"

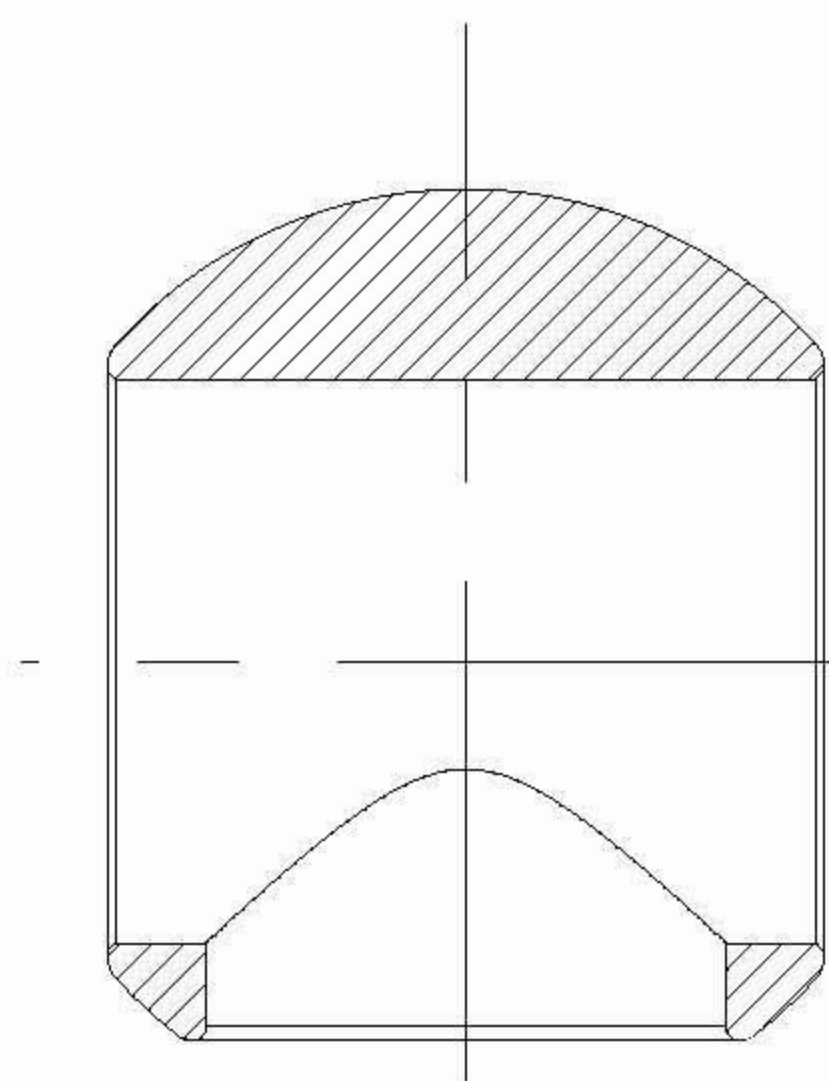

SFERA "L"

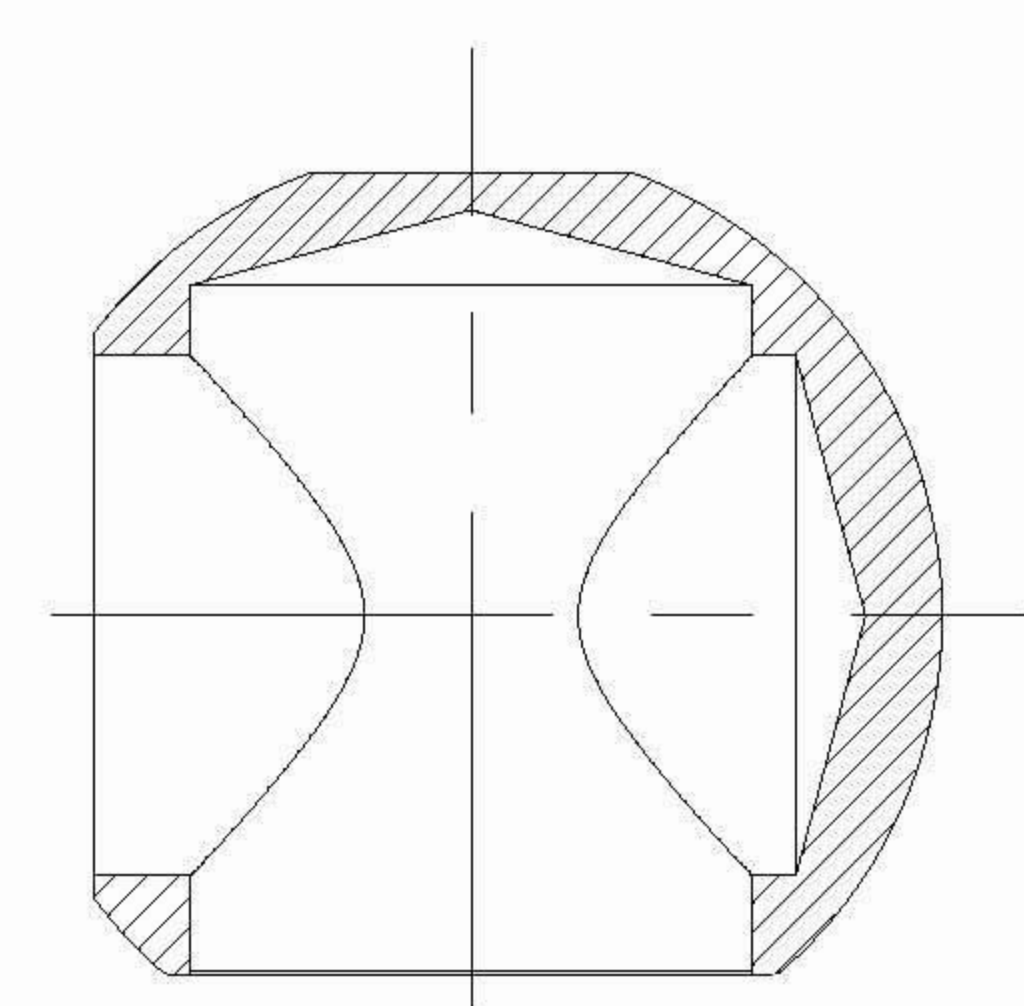

DN	A	B1	C	D	E	L1	L2	L3	L4	t1	SW1
Rp 1/4"ISO 7/1	10	0	110	46	47	46	23	52	26	10	19
Rp 3/8"ISO 7/1	10	10	110	46	47	52	26	52	26	11,4	22
Rp 1/2"ISO 7/1	15	13	102	49	50	66	33	66	33	15	27
Rp 3/4"ISO 7/1	20	17	129	62	62,5	76	38	76	38	16,3	32
Rp 1"ISO 7/1	25	,5	129	67	67	90	45	93	46,5	19,1	41
Rp 1-1/4"ISO 7/1	32	22	159	82	82,5	110	55	108	54	21,4	50
Rp 1-1/2"ISO 7/1	40	28	159	89	89	120	60	126	63	21,4	55
Rp 2"ISO 7/1	50	35	188	110	110	140	70	146	73	25,7	70
Rp 2-1/2"ISO 7/1	63	44	188	120	/	164	82	/	/	30,1	90