6950

34 liter Total opening drum with handles



| Product part | Product code | Materials |
|--------------|--------------|-----------|
| Drum | 6950 | HDPE |
| Handle | 6800 | HDPE |
| Lid | 6950 | HDPE |
| Gasket | H14 | EPDM |

| Capacity | Liters | US Gallons |
|-------------|--------|------------|
| Brimful | 34.9 | 9.22 |
| When closed | 34 | 8.98 |

| Hazardous material information | |
|--------------------------------|-----------------------------|
| Hazardous material type | Solids |
| Packaging group | I – II – III |
| UN marking | UN/1H2/X48/S//NL/CURTEC 286 |
| Maximum gross mass (kg) | X=48 |



| Weight | Grams | Ounces |
|--------|-------|--------|
| Drum | 1380 | 48.68 |
| Handle | 90 | 3.18 |
| Lid | 374 | 13.19 |
| Gasket | 26 | 0.92 |
| Total | 1870 | 65.97 |

Weight tolerance

All products have a tolerance of ±4% of the initial weight mentioned on this data sheet

| Dimensional tolerances | % |
|------------------------|------|
| Height | ±2.5 |
| Diameter | ±1.5 |

| Wall thickness | mm |
|------------------------|------|
| Minimal wall thickness | ≥1.8 |
| Nominal wall thickness | ≥2.0 |

| Colors | Color code | PMS references |
|--------|------------|----------------|
| Drum* | White 004 | / |
| Lid* | Red 402 | 199 C |
| Handle | Black 101 | / |

^{*} Other colors available on request

| Product identification | Drum | Lid |
|------------------------------|-----------|--------|
| Manufacturer ID | Bottom | |
| Product code | Bottom | |
| Recycle logo / Material type | Bottom | Inside |
| Date clock | Bottom | Inside |
| UN-mark | Side wall | |
| Food logo | Bottom | |
| Material track clock | Bottom | |
| CFR49-mark | Bottom | |

Other information

Maximum filling temperature is 70°C/158°F

Contents must have cooled to 30°C/86°F before containers can be closed and stacked

DoC available on request

UN certificate available on request

MVTR declaration available on request

Watertightness declaration available on request

User manual available on request

All drums can be made tamper evident with application of compact seal # 7800


DISCLAIMER

CurTec manufactures packaging material for a wide range of purposes. This declaration is restricted to the packaging material as it leaves the production facility. CurTec has neither control over final end use of the product nor over processing conditions. It is therefore the responsibility of the end user to check compliance with the relevant regulations and to validate material performance in the end application through proper end use testing.

© 2020 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.



Version 3.0 Page 2 of 2

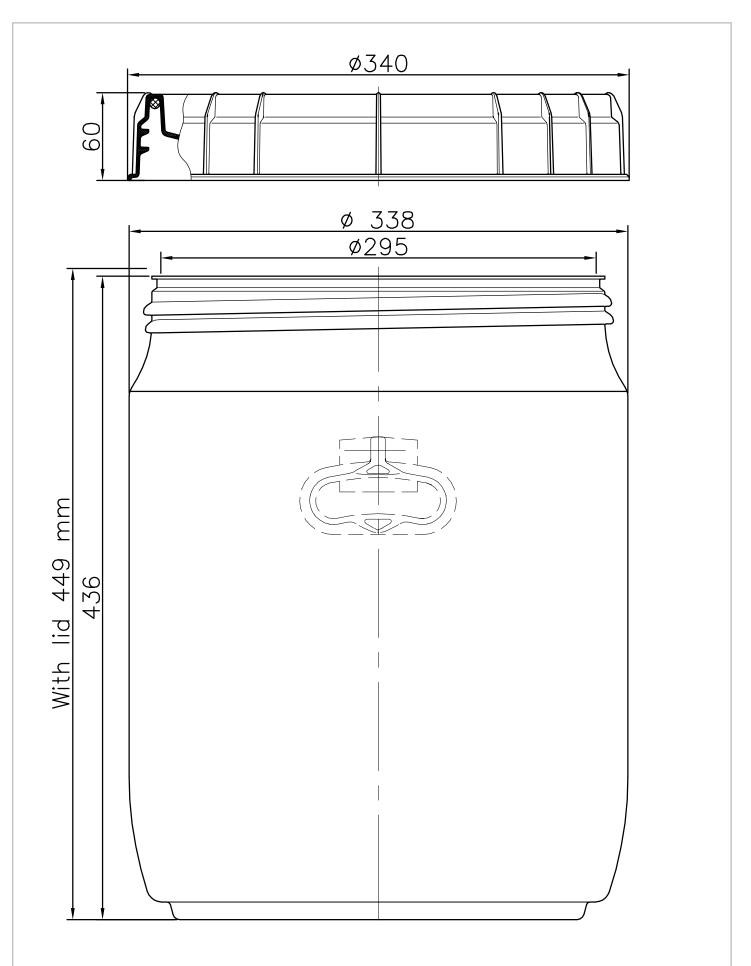

Title Revision Rev. Date Units 6950 Total opening drum 34 liter 12-12-2019 mm 0



This document is property of CurTec Nederland B.V. and may not be copied or communicated without written consent. All Rights Reserved



