


Teknikum LIP™ SD Flex

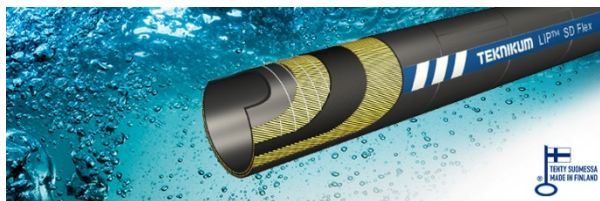

APPLICATIONS

A general-purpose suction and delivery hose for water. The hose is suitable for wide range of industrial and agricultural applications such as industrial water, wastewater or use in tank trucks collecting sewage.

ADVANTAGES

- Safe and durable hose
- Wear-resistant
- Flexible structure
- Antistatic
- Quick and easy installation
- Hoses can be cut on-site

TECHNICAL PROPERTIES

Previous versions

LIP™

(same reference and structure)

Structure

- Tube:
 - black SBR
 - smooth
 - wear resistant
- Reinforcement: textile and steel spiral
- Cover:
 - black SBR
 - wear and weather resistant
 - i.d. 150-200 mm with corrugated cover

- Safety factor: 3 (Burst pressure = 3,0 x Working pressure)

Temperature range

-40°C...+80°C

SUITABLE COUPLINGS AND CLAMPS

Recommended clamp is Teknikum hose clamp.

MANUFACTURER

Teknikum Oy (Business ID FI07645274),
Nokiankatu 1, 38210, Sastamala, Finland

More information

sales@teknikum.com

www.teknikum.com

All rights reserved. © 2020 Teknikum Group Ltd.



TEHTY SUOMESSA
MADE IN FINLAND



ORDER REFERENCE

Product code	Ø i.d. mm	Ø o.d. mm	Working press. MPa	Vacuum max. MPa	Bending radius mm	Weight kg/m	Length m
LIP050	50	61	0,6	0,09	120	1,30	40
LIP063	63	74	0,6	0,09	210	1,60	40
LIP075	76	88	0,6	0,09	310	2,00	40
LIP090	90	103	0,6	0,09	350	2,90	40
LIP100	102	114	0,6	0,09	360	3,10	40
LIP115	115	127	0,6	0,09	430	3,40	20
LIP125	127	141	0,6	0,09	450	3,70	20
LIP150	152	168	0,6	0,09	520	5,80	20
LIP200	203	221	0,6	0,09	690	8,20	10

Other dimensions available on request.

MARKINGS

