




COMPONENTS

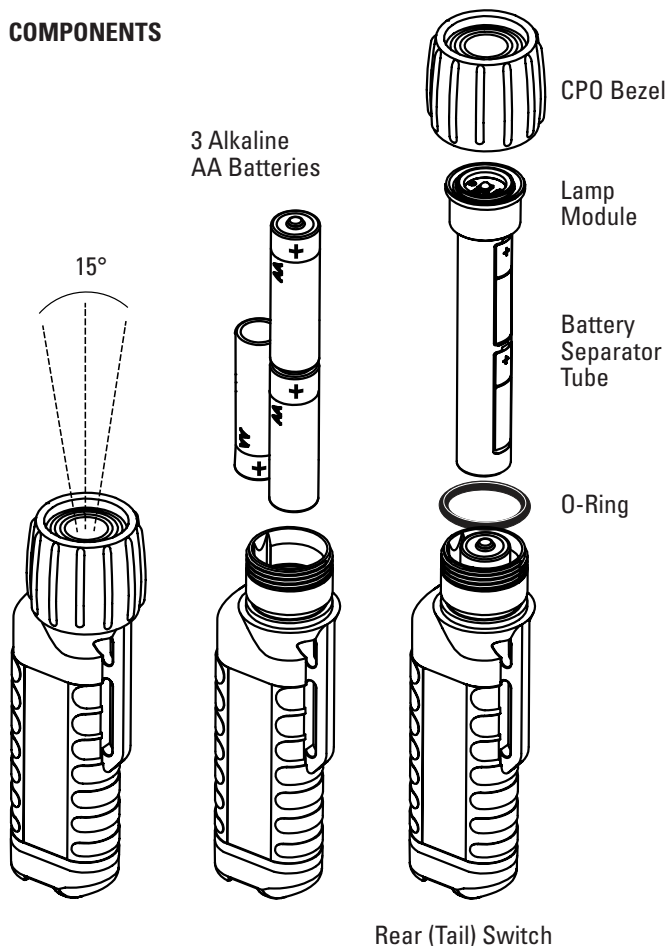

TECHNICAL NAME

UK 3AA eLED CP0-ET12P

CERTIFICATION (ATEX)

SEV 18 ATEX 0177 X
II 1G Ex ia IIC T4 Ga
II 1D Ex ia IIIC T₂₀₀ 135°C Da



Intrinsically safe: Zone 0, 1, 2, 20, 21, 22

Batteries: (3) 1.5 V Alkaline AA / LR6 / Mignon cells - DURACELL OEM (duralock) LR6/AA, DURACELL INDUSTRIAL LR6/AA, DURACELL PLUS POWER LR6/AA, Energizer INDUSTRIAL LR6/AA, Energizer ULTIMATE LITHIUM L91, RAYOVAC AA (4006), VARTA LONGLIFE LR6/AA (4106), VARTA HIGH ENERGY LR6/AA (4906), VARTA LONGLIFE Power LR6/AA (4906)

Permissible temp range: -20°C to +40°C except for use with Energizer INDUSTRIAL (-20°C - +30°C)

TECHNICAL DATA

Model: 3AA eLED CP0

PERFORMANCE DATA

Light Source: eLED
Brightness: 150 lumens (High), 22 lumens (Low)
Beam Distance: 125 m
Weight: 133 g incl. batteries
Waterproof: 1 m

Color Temperature: 6500K

Beam Angle: 15°
Run Time: 7,8 hrs (High), +50 hrs (Low)
Dimensions: 13,5 x 4,1 x 3,6 cm
Enclosure Protection: IP67

Materials: Graphite filled Polycarbonate, TPE Rubber, Polypropylene, Stainless Steel, Resin additives for flame retardancy
Origin: Made in USA

LIGHTS / ART.-NO.

UK 3AA eLED CP02:

10010F graphite, incl. batteries, single pack
510500 graphite, no batteries, bulk

ACCESSORIES

14816 Nylon belt holster for 3AA / 4AA lights
14819 Helmet clip universal for 2AA / 3AA / 4AA lights

