

TECHNICAL FILE
FS102
BASIC ROOF KIT





FS102

BASIC ROOF KIT (10M/15M/20M)

FS2002 | HARNESS

- 1 dorsal D-ring and two front loops for attachment of fall arrest systems
- Size adjustment at chest and legs straps provides a perfect fit to the user
- Easy and fast to put on safety harness with standard buckles in high strength steel
- Harness built in two colors for easier orientation of harness when put on
- Support strap stays low and comfortable, takes up forces during a fall


MATERIAL

- Webbing Polyester
- Metal parts Steel

SPECIFICATIONS

- Size: Universal
- Weight: 0,73 Kg

CE EN361

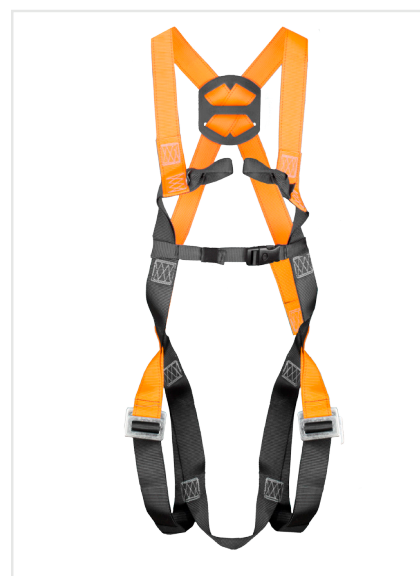

FS2002



FS670 | ANCHOR LINE

- Stainless steel fall arrester with absorber and automatic locking rope grab
- 11mm Kernmantle rope
- Rope grab moves very easy with user, locks immediately at fall
- Rope core and sheath in polyamide with breaking strength 26000N
- Incorporated energy absorber limits arrest force below 6kN.
- Anchor line is supplied without karabiners
- Optional karabiners, choose from FS802 and FS33500-2L
- FS670 anchor lines needs 2pcs karabiners

MATERIAL

- Rope Polyamide
- Webbing Polyester

CE EN353-2

NOTE:

FS670-10M includes:

FS2002+FS670-10M+FS800-1M+2x FS802+ FS8205

FS670-15M includes:

FS2002+FS670-15M+FS800-1M+2x FS802+ FS8205

FS670-20M includes:

FS2002+FS670-15M+FS800-1M+2x FS802+ FS8205



FS670

FS800-1M | ANCHOR SLING

- Minimum breaking strength: 20kN
- Round Sling 25mm webbing strap

MATERIAL

- Webbing Polyamide

SPECIFICATIONS

- Weight: 0,9 Kg

CE EN795-B



FS800-1M

FS802 | ZINC-PLATED STEEL OVAL KARABINER

- Minimum breaking strength: 23kN
- Max. opening 20mm
- Screw locking closure
- Karabiner in Zinc-plated steel

SPECIFICATIONS

- Width: 55mm
- Length: 108mm
- Weight: 0,16 Kg

CE EN362



2XFS802

FS8205 | RUCKSACK STANDARD

- Backpack Bag resistant black
- For general use
- Includes front pockets, easy access
- It has adjustable straps

SPECIFICATIONS

- Capacity: 24 L
- Weight: 0,39 Kg
- Measurement: 400mm X 300mm X 180mm



FS8205